

# Regularity and Lyapunov Stabilization of Weak Entropy Solutions to Scalar Conservation Laws

Sébastien Blandin, Xavier Litrico, Maria Laura Delle Monache, Benedetto Piccoli, and Alexandre Bayen

**Abstract**—We consider the problem of Lyapunov boundary stabilization of the weak entropy solution to a scalar conservation law with strictly convex flux in one dimension of space, around a uniform equilibrium. We show that for a specific class of boundary conditions, the solution to the initial-boundary value problem for an initial condition with bounded variations can be approximated arbitrarily closely in the  $L^1$  norm by a piecewise smooth solution with finitely many discontinuities. The constructive method we present designs explicit boundary conditions in this class, which guarantee Lyapunov stability of the weak entropy solution to the initial-boundary value problem. We show how the greedy control, obtained by maximizing the decrease of the natural Lyapunov function, may fail to asymptotically stabilize and a brute force control generates unbounded variation of traces. We then design a stabilizing control, which avoid oscillations, and propose a nonlocal technique (depending on time and the whole initial datum) which optimizes the convergence time. Controllers performance is illustrated on numerical benchmarks using the Godunov scheme.

**Index Terms**—Boundary value problems, distributed parameter systems, Lyapunov methods, partial differential equations.

## I. INTRODUCTION

### A. Motivation

The conservation principle is one of the most fundamental modeling principles for physical systems. Statements of conservation of mass, momentum, energy are at the center of modern classical physics. For distributed dynamical systems, this principle can be written in *conservation law* form with the use of *partial differential equations* (PDE). The problem of *well-posedness* of the partial differential equation is concerned with the existence, uniqueness, and continuous dependence of the solution to the problem data [35].

Manuscript received February 2, 2016; revised May 5, 2016; accepted July 1, 2016. Date of publication July 12, 2016; date of current version March 27, 2017. Recommended by Associate Editor C. Prieur. (Corresponding author: Sébastien Blandin.)

S. Blandin is with IBM Research, Singapore 486048 (e-mail: sblandin@sg.ibm.com).

X. Litrico is with the LyRE, Suez R&D Center, Suez Water, 33400 Bordeaux, France (e-mail: xavier.litrico@lyonnaise-des-eaux.fr).

M. L. Delle Monache is with the Department of Mathematical Sciences, Rutgers University-Camden, Camden, NJ 08102 USA (e-mail: ml.dellemonache@rutgers.edu).

B. Piccoli is with the Department of Mathematical Sciences, Center for Computational and Integrative Biology, Rutgers University-Camden, Camden, NJ 08102 USA (e-mail: piccoli@camden.rutgers.edu).

A. Bayen is with the Department of Electrical Engineering and Computer Sciences, Department of Civil and Environmental Engineering, University of California, Berkeley, CA 94720 USA (e-mail: bayen@berkeley.edu).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/TAC.2016.2590598

First existence results for scalar conservation laws in one dimension of space date back to [63]. For hyperbolic systems of conservation laws in one dimension of space, existence results were provided in [41] with the introduction of the *random choice method*. Existence and uniqueness in the scalar case for several dimensions of spaces were proven in [51], and to this date constitute the only general results known on well-posedness for several dimensions of space. Existence and uniqueness for  $n \times n$  hyperbolic systems of conservation laws in one-dimension of space was shown only recently, see [21] and [23] for systems with genuinely nonlinear or linearly degenerate characteristic families, and [9], [15] for the general case of systems of strictly hyperbolic conservation laws. The global well-posedness of solutions to hyperbolic systems of conservation laws in several dimensions of space is still largely open.

The keystone of well-posedness results, and a standard argument for constructive existence proofs, is the consideration of a functional space in which small variations in the problem data, i.e., initial condition for the *Cauchy problem*, initial and boundary conditions for the *initial-boundary value problem* (IBVP), create only small variations in the tentative solution.

The control problem is posed from a different perspective, and in different terms. In the case of boundary control [50], the control problem consists of an objective trajectory for the system in a given functional space, and the knowledge of an initial condition. The problem of *control* [26] or *stabilization* [49] consists in the existence and design of a controller, i.e., boundary conditions in the case of boundary control or stabilization, for which the solution to the partial differential equation stays in a domain prescribed by the objective trajectory.

In this paper we propose to show Lyapunov stability of the solution to the initial-boundary value problem associated with a scalar conservation law under suitably designed boundary conditions. We consider a scalar conservation law with smooth strictly concave or convex flux in one dimension of space. This partial differential equation is called the *Burgers equation* [45] in the case of a quadratic convex flux, and in the case of a concave flux, corresponds to the *Lighthill-Whitham-Richards* (LWR) [58], [69] PDE in its various forms, used in particular for macroscopic traffic flow modeling. The problem is defined in the following section.

### B. Problem Statement

Consider the scalar conservation law in one dimension of space

$$\partial_t u + \partial_x f(u) = 0 \quad (1)$$

on the domain  $\Omega \doteq \{(t, x) | t \geq 0 \text{ and } a \leq x \leq b\}$ . The flux function  $f(\cdot)$  is assumed to be smooth (infinitely differentiable)

and strictly convex or strictly concave.<sup>1</sup> The initial-boundary value problem (IBVP) for (1) in  $\Omega$  with initial condition  $u_0 : (a, b) \mapsto \mathbb{R}$ , and boundary conditions  $u_a, u_b : \mathbb{R}^+ \mapsto \mathbb{R}$ , reads

$$\partial_t u + \partial_x f(u) = 0 \quad (2)$$

$$u(0, x) = u_0(x) \quad (3)$$

$$u(t, a) = u_a(t), \quad u(t, b) = u_b(t). \quad (4)$$

The Lyapunov boundary stabilization problem can now be formulated.

**Definition 1:** Given a stationary solution  $u^*$  to the PDE (1), the Lyapunov (resp. asymptotic) boundary stabilization problem consists in the existence of boundary conditions  $u_a, u_b$  depending on initial condition  $u_0$  with bounded variations (see Section II-A) such that the following is true. The IBVP (2)–(4) is well-posed and its solution is (resp. asymptotically) stable in the sense of Lyapunov at  $u^*$ .

Note that Lyapunov (resp. asymptotic) stabilization consists in the existence of a positive definite function decreasing (resp. vanishing) in time along trajectories of the system.

Stationary solutions to the PDE include constant solutions and solutions with a single stationary jump discontinuity, called shock. In this paper, we address the case of constant solutions.

The well-posedness of the IBVP (2)–(4) is critical to the definition of the problem, since the design of arbitrary boundary conditions can make the problem ill-posed (see [74] for an illustration on the LWR equation in the case of traffic). This would lead to a discrepancy between the control implemented and its realized value in the system, and a divergence between the desired trajectory of the system and its real trajectory. In the case of traffic, it corresponds for instance to installing a green traffic light at the location of a traffic jam with the intended goal that cars in the jam adopt the corresponding free-flow speed. For well-posedness of the IBVP (2)–(4), the PDE (1) and the boundary conditions (4) must be understood in the weak sense. The weak formulation is presented in Section II-B.

The following section consists in a review of results on boundary control of partial differential equations.

### C. Literature Review

The problem of boundary control of partial differential equations has been the focus of ongoing research. A large volume of literature is concerned with the problem of boundary control of the viscous Burgers equation. Control results can be found in [24], [25], [28], [39], [40], [47], [48], [53], [62], [65], [72]. A Lyapunov approach, from which the method presented in this paper was inspired, has been proposed in [48], for classical solutions to the PDE.

Lyapunov methods for classical solutions of networks of scalar conservation laws have also been proposed in [13] and [67], and for classical solutions of  $2 \times 2$  systems with characteristic speeds of constant opposite sign in [27] and [33]. Similar work on boundary damping techniques with applications to the Saint-Venant equations has been proposed in [30] and [68]. Switching techniques for linear hyperbolic systems are investigated in [4], and asymptotic stabilization using a stationary feedback law in [66]. A frequency domain framework [59]

<sup>1</sup>This is equivalent to the condition of genuine nonlinearity of the characteristic field.

has been used to design a boundary control for the linearized Saint-Venant equations in [60] (see also [44] for boundary control of the Saint-Venant equations). A specific method for *flat* systems has been introduced in [36]. For a recent application of backstepping, the reader is referred to [76].

Methods developed specifically for well-posedness results of conservation laws have also been applied to the problem of boundary control. In [6], a wavefront tracking method was used to compute the fixed horizon attainable set of initial-boundary value problem solutions of Temple systems of conservation laws. In [5] and [7], the authors studied the attainable sets for the same problem, i.e., the set of functions which can be reached by acting with controls. The problem of asymptotic stabilization by boundary controls was studied also in [8] and [20] under the non-characteristic condition. In particular, the paper [20] provides a counterexample to exact controllability.

Frameworks arising from the field of optimal control have also been applied to this problem [46]. In [10], the authors proposed a viability framework for a Hamilton-Jacobi equation corresponding to an integral form of the Burgers equation, which leads to lower semi-continuous solutions. A linear relaxation method for the nonlinear discrete dynamics of the asymmetric cell-transmission model, a specific instantiation of the Godunov scheme for the LWR equation, has also been proposed in [43], with subsequent global optimization of the obtained equivalent convex problem.

One of the challenging features of conservation laws is the apparition of discontinuities in finite time in the solution to the Cauchy problem, even for smooth initial condition. This yields difficulties for most control approaches since classical control methods are not well-suited to handle discontinuities. In the case of parametric initial conditions, the problem of differentiating the solution to the scalar conservation law with respect to the initial condition parameter has been specifically addressed in [12] from a mathematical perspective. One must also note the more general shift differentiability method for functionals on  $L^1 \cap BV$  introduced in [14] and [22] (see Section II-A for a definition of the class of  $BV$  functions).

A second specific challenge of boundary control of the solution to a conservation law, also due to the non-linearity of the PDE, is the fact that weak boundary conditions have to be considered. In this work, we specifically account for these two issues and show the stability of the weak entropy solution to the scalar conservation law (1). The main contributions of this paper are the following:

- **Well-posedness result:** we consider data with a finite number of shocks and otherwise positive gradient and show well-posedness of the IBVP associated to a stabilizing control with the scalar conservation law in this class. The corresponding piecewise smooth solution can approximate arbitrarily well the solution to an IBVP with  $BV$  initial condition.
- **Stabilization of a Lyapunov function candidate:** we show that there exists a strictly decreasing Lyapunov function for the scalar conservation law for appropriate boundary conditions.
- **Controller design:** we identify explicitly the boundary conditions that maximize the decrease rate of the Lyapunov function and show that they may not stabilize the system. A stabilizing control is then designed. The latter keeps the

solution in the piecewise smooth class, can be extended to BV data and guarantees asymptotic stability (which in turn implies  $L^2$  convergence of solutions). We also design nonlocal strategies to improve the convergence time.

The remainder of the paper is organized as follows. Section II defines the notations used later in the paper and states useful lemmas. Section III contains the proof of well-posedness of the initial-boundary value problem with piecewise-smooth increasing datum with negative gradient concentrated at a finite number of locations. Preparatory derivations involving the Lyapunov function candidate can be found in Section IV. In Section V, we show stability of the Lyapunov function for weak entropy solutions to the scalar conservation law remaining in the special class with a finite number of shocks. In Section VI we design a controller that maximizes the instantaneous decrease of the Lyapunov function identified previously, but highlight several configurations in which asymptotic stability is not achieved by this controller. We also illustrate how a brute force controller introduces unbounded oscillations, in the form of infinite variation of the solution traces. In Section VII we design a new controller which guarantees asymptotic stability and the existence of solution to the IBVP in the special class of solutions with a finite number of shocks. Moreover, we design nonlocal controllers, depending on the whole initial datum, which improve the convergence time. Numerical examples are proposed in Section VIII, and promising research avenues related to this work in Section IX.

## II. PRELIMINARIES

In this section, we introduce results subsequently used throughout the paper.

### A. BV Functions

Consider an interval  $J \subset \mathbb{R}$ , and a map  $u : J \mapsto \mathbb{R}$ . The *total variation* of  $u$  is defined as

$$\text{Tot.Var.}\{u\} \doteq \sup \left\{ \sum_{i=1}^N |u(x_j) - u(x_{j-1})| \right\} \quad (5)$$

where the supremum is taken over all  $N \geq 1$  and all  $(N+1)$ -tuples of points  $x_j \in J$  such that  $x_0 < x_1 < \dots < x_N$ . If the total variation of  $u$  is finite then we write  $u \in BV$ . Specific properties of BV functions leveraged in the following sections are presented below.<sup>2</sup>

**Lemma 1:** [19] Let  $u : (a, b) \mapsto \mathbb{R}^n$  have bounded variation. Then for every  $x \in (a, b)$ , the left and right limits  $u(x-) \doteq \lim_{y \rightarrow x-} u(y)$ , as well as  $u(x+) \doteq \lim_{y \rightarrow x+} u(y)$  are well defined. Moreover,  $u$  has at most countably many points of discontinuity.

The following lemma concerns piecewise constant approximability of BV functions.

**Lemma 2:** [19] Let  $u : \mathbb{R} \mapsto \mathbb{R}^n$  be right continuous with bounded variation. Then, for every  $\epsilon > 0$ , there exists a piecewise constant function  $v$  such that  $\text{Tot.Var.}\{v\} \leq \text{Tot.Var.}\{u\}$ , as well as  $\|v - u\|_{L^\infty} \leq \epsilon$ . If, in addition

$$\int_{-\infty}^0 |u(x) - u(-\infty)| dx + \int_0^{+\infty} |u(x) - u(\infty)| dx < \infty$$

<sup>2</sup>Proofs of these properties can be found in section 2.4 of [19].

then one can find  $v$  with the additional property

$$\|u - v\|_{L^1} \leq \epsilon.$$

The space of BV functions and its closure in  $L^1$  are at the center of well-posedness results for conservation laws using wavefront-tracking methods.

### B. Weak Solutions to the Initial-Boundary Value Problem

It is well-known that jump discontinuities can arise in finite time in solutions to conservation laws [35]. Thus classical solutions do not exist in general, and it is necessary to consider a more general formulation of the conservation law.

**1) Weak Entropy Solution to the Cauchy Problem:** The *weak formulation* of the conservation law is obtained by considering derivatives in the sense of distribution.

**Definition 2:** A function  $u : [0, T] \times \mathbb{R} \mapsto \mathbb{R}$  is a weak solution to the Cauchy problem (2), (3) if for any continuously differentiable function  $\phi$  with compact support contained in  $(-\infty, T) \times \mathbb{R}$

$$\int_0^T \int_{-\infty}^{\infty} (u \phi_t + f(u) \phi_x) dx dt + \int_{-\infty}^{\infty} u_0(x) \phi(0, x) dx = 0 \quad (6)$$

and  $t \mapsto u(t, \cdot)$  is continuous from  $[0, T]$  into  $L^1_{\text{loc}}$ .

Given that  $u$  is smooth around a jump discontinuity, integrating the weak formulation (6) yields the *Rankine-Hugoniot* relation [35] defining the speed  $\sigma$  of propagation of jump discontinuities

$$\sigma \Delta u = \Delta f(u) \quad (7)$$

where  $\Delta u = u_r - u_l$  is the jump in  $u$ , with  $u_r$ , respectively  $u_l$ , the value of the right, respectively left, limit of  $u$  at the jump location.

To isolate a unique weak solution to a Cauchy problem associated with the conservation law, an additional *admissibility condition* (see Section 4.5 of [29]) is required. Different conditions have been proposed in the literature. In the scalar case, one of the first admissibility conditions, due to Oleinik [63], states that for a shock joining a left state  $u_l$  and a right state  $u_r$ , the following inequality must be satisfied for all  $u$  between  $u_l$  and  $u_r$ :

$$\frac{f(u) - f(u_l)}{u - u_l} \geq \sigma \geq \frac{f(u) - f(u_r)}{u - u_r} \quad (8)$$

where  $\sigma$  is the Rankine-Hugoniot speed (7). Kruzhkov [51] showed that it was sufficient to satisfy the entropy inequality condition for a specific family of entropy-entropy flux pairs in the scalar case, yielding the Kruzhkov entropy condition. The Lax admissibility condition [52], which exhibits a convenient geometric interpretation, states that for a shock joining a left state  $u_l$  and a right state  $u_r$ , the following inequality must be satisfied:

$$\lambda(u_l) \geq \sigma \geq \lambda(u_r) \quad (9)$$

where  $\lambda(u)$  is the characteristic speed of  $u$  (i.e.,  $f'(u)$ ), and  $\sigma$  is the Rankine-Hugoniot speed (7). For the case of systems one requires that condition (9) holds for a genuinely nonlinear or linearly degenerate  $i$ -th characteristic family with  $\lambda$  replaced by the  $i$ -th eigenvalue  $\lambda_i$  of the Jacobian matrix  $DF(u)$ . In the scalar case, for a convex flux, these formulations have been proven to be equivalent (see Section 2.1 of [55]). The

Lax admissibility condition allows the selection of a particular weak solution.

**Definition 3:** A function  $u : [0, T] \times \mathbb{R} \mapsto \mathbb{R}$  is the weak entropy solution to the Cauchy problem (2), (3) if it is a weak solution (definition 2), that satisfies the Lax admissibility condition (9).

The definition of weak conditions to the IBVP requires a corresponding statement of *weak boundary conditions*, presented in the following section.

**2) Weak Boundary Conditions:** The first statement of weak boundary conditions was introduced in [11] in the scalar case in multiple dimensions of space, with  $C^2$  flux and  $C^2$  initial and boundary datum, using a vanishing viscosity method. In one dimension, this formulation reads

$$\max_{k \in [\alpha, \beta]} \operatorname{sgn}(u(t, a) - u_a(t)) (f(u(t, a)) - f(k)) = 0 \quad (10)$$

$$\min_{k \in [\gamma, \delta]} \operatorname{sgn}(u(t, b) - u_b(t)) (f(u(t, b)) - f(k)) = 0 \quad (11)$$

for almost all  $t > 0$ , and where  $\alpha = \min(u(t, a), u_a(t))$ ,  $\beta = \max(u(t, a), u_a(t))$ ,  $\gamma = \min(u(t, b), u_b(t))$ ,  $\delta = \max(u(t, b), u_b(t))$ , and  $\operatorname{sgn}$  denotes the sign function. For the case of systems of conservation laws, the interested reader is referred to [16] and [71]. In the scalar case, at a left boundary  $a$ , the corresponding statement of weak boundary conditions derived from the structure of the solution to the Riemann problem is the following.

**Definition 4:** A function  $u : \Omega \mapsto \mathbb{R}$  satisfies the boundary condition  $u_a$  at  $a$  if for almost every time  $t$  (in the sense of Lebesgue measure), the solution to the Riemann problem centered at  $a$  with initial data

$$\begin{cases} u_a(t) & \text{if } x < a \\ u(t, a) & \text{if } x > a \end{cases} \quad (12)$$


either does not contain any wave (when left and right initial states are the same), or contains waves with non positive speeds (a wave with zero speed is allowed). Notice that for weak solutions we consider the condition will hold for all times except a finite number.

The domain of the couples boundary condition-boundary trace satisfying the weak boundary conditions (Definition 4) is represented in Fig. 1 for a Burgers flux. In [54], a simplified formulation is proposed for the scalar case with strictly convex continuously differentiable flux functions (see also [37]). Similar formulations were derived for a scalar traffic model in [74] and scalar traffic models on networks with application to estimation in [77], following [38]. In the case of a strictly convex continuously differentiable flux, this statement states that for almost all times  $t$ , one of the following mutually exclusive conditions must be satisfied:

$$\begin{cases} u(t, a) = u_a(t) \\ f'(u(t, a)) \leq 0 \text{ and } f'(u_a(t)) \leq 0 \text{ and } u(t, a) \neq u_a(t) \\ f'(u(t, a)) \leq 0 \text{ and } f'(u_a(t)) > 0 \text{ and } f(u(t, a)) \geq f(u_a(t)). \end{cases} \quad (13)$$

The same can be done at the downstream boundary  $x = b$

$$\begin{cases} u(t, b) = u_b(t) \\ f'(u(t, b)) \geq 0 \text{ and } f'(u_b(t)) \geq 0 \text{ and } u(t, b) \neq u_b(t) \\ f'(u(t, b)) \geq 0 \text{ and } f'(u_b(t)) < 0 \text{ and } f(u(t, b)) \geq f(u_b(t)). \end{cases} \quad (14)$$

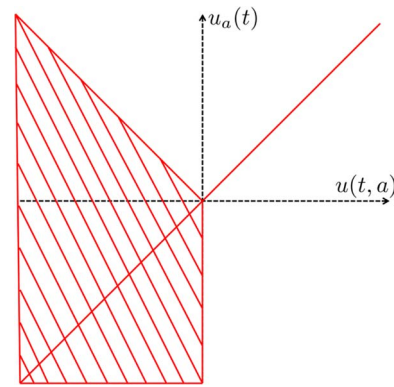

**Fig. 1. Weak boundary conditions:** in the case of a quadratic convex flux centered at 0. The solution to the Riemann problem with initial datum in the striped domain exhibits a wave with negative speed. For initial datum on the first bisector, no wave arises. The white zone exists only for a zero time duration.

A well-posedness result for the IBVP associated with a scalar conservation law (1) with the boundary statement from Definition 4 is presented in the following section.

### C. Well-Posedness of the Initial-Boundary Value Problem

In [11], a solution satisfying (6) in the scalar case is constructed using a vanishing viscosity method for the weak boundary conditions statement (10), (11) and is shown to be the admissible solution according to Kruzhkov entropy condition [51].

More recently, an existence result for  $n \times n$  systems using wavefront tracking was proposed in [1]. The *standard Riemann semigroup* (SRS) method, introduced in [18] for the Cauchy problem associated with a Temple system [75] of conservation laws, was extended to the IBVP in [2] and [3], with the boundary conditions statement from Definition 4. In [3], it is shown for a  $n \times n$  system that if the SRS exist, its trajectories coincide with wavefront tracking solutions. Uniqueness and continuous dependence is obtained for the case of non-characteristic conditions, and uniqueness for the characteristic case. The SRS is constructed for  $2 \times 2$  system in [2], and for the case of  $n \times n$  system in [32]. The stability of the IBVP with two boundaries was established via vanishing viscosity for  $2 \times 2$  systems in [73]. We state in the scalar case for a static boundary the main result of [2] for characteristic boundary conditions, obtained for  $2 \times 2$  systems with continuous boundary (see theorem C of [2]). A general result for  $n \times n$  systems was established in [8].

**Theorem 1:** [2] Let  $f$  be a smooth map such that the (1) is strictly hyperbolic with characteristic field linearly degenerate or genuinely nonlinear (i.e.,  $f$  is linear, convex or concave). For every  $\delta > 0$  there exists  $L > 0$  and a continuous semigroup  $S$  defined for data in  $L^1 \cap BV$  with total variation bounded by  $\delta$ , such that

- The map  $t \mapsto u(t, \cdot)$  yields a weak solution to the IBVP (2)–(4).
- For piecewise constant initial and boundary data, the trajectories of the semigroup coincide with the solution to the IBVP obtained by piecing together the standard solutions to the Riemann problems at the points of discontinuity of the initial condition and at the boundary.

- For initial data  $u'_0, u''_0$ , boundary data  $u'_a, u''_a, u'_b, u''_b$  in  $L^1 \cap BV$  with total variation bounded by  $\delta$ , let  $u', u''$  denote the corresponding trajectories of the semigroup  $S$ , and  $t', t'' > 0$ , then  $\|u'(t', \cdot) - u''(t'', \cdot)\|_1 \leq L(|t' - t''| + \|u'_0 - u''_0\|_1 + \|u'_a - u''_a\|_1 + \|u'_b - u''_b\|_1)$ .

We also refer the interested reader to the work of Otto [64] for the case where the entropy solution does not have traces at the boundary, see also [70]. In the following section we use this result in the case of a left and a right boundary to show that we can restrict our Lyapunov analysis to the case of piecewise smooth data.

### III. APPROXIMATION OF SOLUTION TO INITIAL-BOUNDARY VALUE PROBLEM BY PIECEWISE SMOOTH SOLUTION

In this section, we present results on the approximability of the solution to an IBVP with initial condition in BV by the solution to an IBVP with piecewise smooth solution at all times. We show that the solution to the IBVP with BV data can be approximated arbitrarily closely in the  $L^1$  norm by the solution to an IBVP with piecewise smooth data. We define the required regularity class used throughout the paper.

**Definition 5:** We note  $PWS^+$  the class of piecewise smooth functions  $f : \mathbb{R} \mapsto \mathbb{R}$  such that

- $f'$  is positive (where defined).
- $f$  has only downward jumps (i.e.,  $f'$  seen as measure has only negative Dirac masses).

We now state the approximability result.

**Theorem 2:** Consider  $T > 0$ ,  $a < b$ , and let  $u_0 : (a, b) \mapsto \mathbb{R}$ ,  $u_a, u_b : (0, T) \mapsto \mathbb{R}$  be functions with bounded total variation. For every  $\epsilon > 0$ , there exists  $u_0^\epsilon : (a, b) \mapsto \mathbb{R}$  in  $PWS^+$  and piecewise constant boundary data  $u_a^\epsilon, u_b^\epsilon : (0, T) \mapsto \mathbb{R}$  such that  $\|u_a(t) - u_a^\epsilon(t)\|_1 \leq \epsilon$ , and  $\|u_b(t) - u_b^\epsilon(t)\|_1 \leq \epsilon$ . Moreover, the solution  $u$  to the IBVP for (1) and data  $(u_0, u_a, u_b)$ , and the solution  $u^\epsilon$  to the IBVP for (1) and data  $(u_0^\epsilon, u_a^\epsilon, u_b^\epsilon)$ , satisfy  $\forall 0 \leq t \leq T$ , and  $\|u(t, \cdot) - u^\epsilon(t, \cdot)\|_1 \leq \epsilon$ .

*Proof:* Using Lemma 2 in the compact domain  $[a, b]$ , we can approximate the initial condition  $u_0$  arbitrarily closely in the  $L^1$  sense by a piecewise constant function  $u_0^\epsilon$  with a finite number of discontinuities and lower total variation. Also we can replace the upward jumps of  $u_0^\epsilon$  with smooth increasing functions without increasing the total variation. We can also approximate boundary data by piecewise constant functions of lower variation.

Since  $u_0^\epsilon$  has only positive derivative, no new shock can form in the solution inside the domain. Moreover, a finite number of shocks will be introduced by the boundary conditions. Therefore the solution  $u^\epsilon$  will remain in the class  $PWS^+$ .

Using the continuous dependence result of Theorem 1, the resulting trajectories  $u, u^\epsilon$  of the semigroup can be made arbitrarily close in the  $L^1$  norm by controlling the distance between the initial conditions. ■

We show that under suitable boundary conditions, the solution to the IBVP with piecewise smooth data is piecewise smooth.

**Theorem 3:** Let  $T, \delta > 0$ ,  $a < b$ , and let  $u_0 : (a, b) \mapsto \mathbb{R}$  be in  $PWS^+$  and  $u_a, u_b : (0, T) \mapsto \mathbb{R}$  be piecewise constant. Let

$u$  denote the solution to the IBVP (6), (3)–(12). At all times  $0 \leq t \leq T$ ,  $u(t, \cdot)$  is piecewise smooth.

*Proof:* Let  $x_1, \dots, x_N$  denote the locations of the discontinuities in the initial condition, including  $a, b$ . We construct the solution to the IBVP by piecing together the shock waves created at  $x_i$ , and the classical solution constructed by the method of characteristics between the waves. By definition, the solution created is a solution in the sense of (6) since (1) is satisfied in the classical sense between the waves, and the shock waves propagate according to the Rankine-Hugoniot relation (7). It is also the admissible solution according to the Lax condition (9) thus the constructed solution coincides with the trajectory of the semigroup from Theorem 2 (see [21]).

We now show that at all time, the number of discontinuities is finite. Since there is a finite number of discontinuities in the initial and boundary conditions, a finite number of discontinuities enters the space-time domain. In the scalar case the interaction of two discontinuities creates no more than one discontinuity, so the interaction of discontinuities contributes to decreasing their number. Finally as mentioned above, since the initial and boundary conditions are piecewise smooth increasing, all discontinuities are created at time 0 or at the boundary. ■

In the next section, we present the Lyapunov stability analysis for functions in  $PWS^+$ .

### IV. LYAPUNOV ANALYSIS

In this section, we propose a Lyapunov function and compute its derivative. In the following we call  $\tilde{u} = u - u^*$  where  $u^*$  is a constant, hence stationary, solution around which we want to stabilize the system, and  $u$  is the solution to the IBVP associated with the scalar conservation law (1). Following the results from Section III, we assume that  $u$  is in  $PWS^+$ .

#### A. Lyapunov Function Candidate

We consider the classical Lyapunov function candidate [48], [50]

$$V(t) = \frac{1}{2} \int_a^b \tilde{u}^2(t, x) dx = \frac{1}{2} \int_a^b (u(t, x) - u^*)^2 dx \quad (15)$$

where  $u$  is a weak solution to the scalar conservation law. From definition 3, we have  $t \mapsto u(t, \cdot)$  continuous from  $[0, T]$  to  $L^1$ , and the function  $V(\cdot)$  is well-defined and continuous. We index the jump discontinuities of  $u(t, \cdot)$  in increasing order of their location at time  $t$  by  $i = 0, \dots, N(t)$ , including for notational purposes the boundaries  $a, b$ , with  $x_0(t) = a$  and  $x_N(t) = b$ . The Lyapunov function candidate can be rewritten as

$$V(t) = \frac{1}{2} \sum_{i=0}^{N(t)-1} \int_{x_i(t)}^{x_{i+1}(t)} \tilde{u}^2(t, x) dx. \quad (16)$$

From Theorem 3, we know that for all integer  $i \in [0, N(t))$ , the function  $u(t, \cdot)$  is smooth in the domain  $(x_i(t), x_{i+1}(t))$ , thus  $\partial_t u(t, \cdot)$  exists and is continuous for  $t$  such that  $x_i(t) < x_{i+1}(t)$ . Since discontinuity trajectories are differentiable with speed given by the Rankine-Hugoniot relation (7), it follows that at any time  $t$  such that  $N(t)$  is constant in a neighborhood of  $t$  and the boundary trace is continuous, the function  $V(\cdot)$  is differentiable.

## B. Differentiation of the Lyapunov Function Candidate

In this section, we compute the derivative of the Lyapunov function candidate (15), at any time  $t$  such that  $N(t)$  is constant in a neighborhood and the boundary trace is continuous. Differentiating expression (16) yields

$$\begin{aligned} \frac{dV}{dt}(t) &= \frac{1}{2} \sum_{i=0}^{N(t)-1} \int_{x_i(t)}^{x_{i+1}(t)} \partial_t \tilde{u}^2 dx \\ &+ \frac{1}{2} \sum_{i=0}^{N(t)-1} \left[ \tilde{u}^2(t, x_{i+1}(t)-) \frac{dx_{i+1}}{dt}(t) \right. \\ &\quad \left. - \tilde{u}^2(t, x_i(t)+) \frac{dx_i}{dt}(t) \right]. \end{aligned} \quad (17)$$

As detailed at the end of Section IV-A, the term under the sum is smooth, and we can write  $\partial_t \tilde{u}^2 = 2 \tilde{u} \partial_t \tilde{u}$ . Since  $u$  satisfies the conservation law (1), we have  $\partial_t \tilde{u} = -\partial_x f(\tilde{u} + u^*)$ . The derivative of the Lyapunov function can be written as

$$\begin{aligned} \frac{dV}{dt}(t) &= - \sum_{i=0}^{N(t)-1} \int_{x_i(t)}^{x_{i+1}(t)} \tilde{u} \partial_x f(\tilde{u} + u^*) dx \\ &+ \frac{1}{2} \sum_{i=0}^{N(t)-1} \left[ \tilde{u}^2(t, x_{i+1}(t)-) \frac{dx_{i+1}}{dt}(t) \right. \\ &\quad \left. - \tilde{u}^2(t, x_i(t)+) \frac{dx_i}{dt}(t) \right]. \end{aligned}$$

By integrating by part the sum terms, and if note  $F(\cdot)$  a primitive function of the flux function  $f(\cdot)$  we have

$$\begin{aligned} \frac{dV}{dt}(t) &= \tilde{u}(t, a) f(\tilde{u}(t, a) + u^*) - \tilde{u}(t, b) f(\tilde{u}(t, b) + u^*) \\ &\quad - F(\tilde{u}(t, a) + u^*) + F(\tilde{u}(t, b) + u^*) \\ &+ \sum_{i=1}^{N(t)-1} \left[ \Delta_i (\tilde{u} f(\tilde{u} + u^*) - F(\tilde{u} + u^*)) \right. \\ &\quad \left. - \frac{1}{2} \frac{dx_i}{dt}(t) \Delta_i \tilde{u}^2 \right] \end{aligned}$$

where  $\Delta_i$  is defined around the discontinuity  $x_i(t)$  as in (7). Using the Rankine-Hugoniot relation, defined in (7), to write the speed of the jump discontinuity  $dx_i(t)/dt$  as a function of the left and right jump values we obtain

$$\begin{aligned} \frac{dV}{dt}(t) &= \tilde{u}(t, a) f(\tilde{u}(t, a) + u^*) - \tilde{u}(t, b) f(\tilde{u}(t, b) + u^*) \\ &\quad - F(\tilde{u}(t, a) + u^*) + F(\tilde{u}(t, b) + u^*) \\ &+ \sum_{i=1}^{N(t)-1} \Delta_i (\tilde{u} f(\tilde{u} + u^*) - F(\tilde{u} + u^*)) \\ &\quad - \sum_{i=1}^{N(t)-1} \frac{\tilde{u}(t, x_i-)+\tilde{u}(t, x_i+)}{2} \Delta_i f(\tilde{u} + u^*). \end{aligned} \quad (18)$$

In (18) we gather the first four terms that depend on the boundary trace of the solution, and the last two terms that depend on the shock dynamics inside the domain. In the following section, we analyze the stability properties of the internal terms.

## C. Internal Stability

The last two terms of (18) correspond to jump discontinuity in the solution and are neither observable nor controllable from the boundaries. We now show that these terms have a stabilizing effect on the Lyapunov function candidate (15).

**Proposition 1:** Given a constant solution  $u^*$  to the scalar conservation law (1), we have the following inequality

$$\sum_{i=1}^{N(t)-1} \left[ \Delta_i (\tilde{u} f(\tilde{u} + u^*) - F(\tilde{u} + u^*)) - \frac{\tilde{u}(t, x_i-)+\tilde{u}(t, x_i+)}{2} \Delta_i f(\tilde{u} + u^*) \right] \leq 0 \quad (19)$$

i.e., the jump discontinuity dynamics of the solution  $u$  to the IBVP, contributes to the decrease of the Lyapunov function candidate (15).

*Proof:* In order to show that the term (19) is negative, we show that each term in the sum is negative. If we note  $u_l, u_r$  the value of  $u$  on the left and on the right of the jump discontinuity, respectively, and  $\tilde{u}_l, \tilde{u}_r$  the corresponding reduced variables, we want to show that

$$\begin{aligned} &(\tilde{u}_r f(\tilde{u}_r + u^*) - F(\tilde{u}_r + u^*)) - (\tilde{u}_l f(\tilde{u}_l + u^*) - F(\tilde{u}_l + u^*)) \\ &\quad - \frac{\tilde{u}_l + \tilde{u}_r}{2} (f(\tilde{u}_r + u^*) - f(\tilde{u}_l + u^*)) \leq 0. \end{aligned}$$

Equivalently, in the original state variable  $u = \tilde{u} + u^*$ , we have

$$\begin{aligned} &((u_r - u^*) f(u_r) - F(u_r)) - ((u_l - u^*) f(u_l) - F(u_l)) \\ &\quad - \frac{u_l + u_r - 2u^*}{2} (f(u_r) - f(u_l)) \leq 0. \end{aligned}$$

This can be rewritten as

$$F(u_l) - F(u_r) + \frac{1}{2}(u_r - u_l) (f(u_r) + f(u_l)) \leq 0 \quad (20)$$

which can be obtained from the Oleinik condition (8), here by integration the left inequality of (8) between  $u_l$  and  $u_r$ . Thus any solution satisfying the Oleinik entropy condition benefits from stability of the jump discontinuity dynamics. ■

**Remark 1:** Given that stability of the jump discontinuity dynamics is implied by the Oleinik entropy condition, since the flux function is strictly convex, we see that the internal dynamics is strictly stabilizing, i.e., we have a strict decrease of the Lyapunov function.

**Remark 2:** When the number of shocks is constant inside the domain and the trace of the solution is continuous, the internal dynamics is stabilizing in the sense that it contributes to the decay of the Lyapunov function candidate (15). Since the Lyapunov function candidate is continuous, the internal dynamics is always stabilizing. This is critical for boundary stabilization where the control action cannot apply directly inside the domain (unlike the case of distributed control [31], [34], [57]). From (20), one can note that the magnitude of the internal stability does not depend on the equilibrium  $u^*$ .

**Remark 3:** At a time  $t$  at which the number of discontinuities is not constant or the boundary trace is not continuous, the Lyapunov function is not differentiable, however the difference between the right and left derivative at  $t^+$  and  $t^-$ , respectively, can be computed. This is addressed in Section VI.

If the trace of the solution to the IBVP always takes the value of the boundary condition, it is clear that the solution is stabilizable using boundary control since it amounts to finding

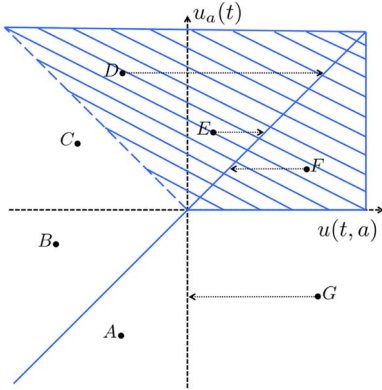


Fig. 2. **Control space:** in the case of a convex quadratic flux with minimum at 0. Top-right quadrant, first bisector, and upper part of top left quadrant (points  $D$ ,  $E$ ,  $F$ ): the control applies, i.e., the boundary trace takes the value of the boundary condition, as represented by the horizontal arrow. Left zone except first bisector (points  $A$ ,  $B$ ,  $C$ ): the control has no effect. Bottom right quadrant (point  $G$ ): any control yields a zero boundary trace, represented by a horizontal projection onto the vertical axis.

boundary controls  $u_a, u_b$  such that  $g(u_a) < g(u_b)$ , where  $g : x \mapsto (x - u_*) f(x) - F(x)$  is not constant (strict convexity of  $f$ ).

However, as described in Section II-B2, this assumption may render the IBVP ill-posed and thus the control inapplicable. In the following section, we show that the Lyapunov function is stabilizable under the proper statement of weak boundary conditions from definition 4.

## V. WELL-POSED BOUNDARY STABILITY

In this section, we motivate and define the *control space* and propose a stabilizing controller.

### A. Control Space

Due to the emergence of jump discontinuities in the solution to the conservation law (1), weak solutions have to be considered, and boundary conditions have to be considered in the weak sense. It means that it is not always possible to enforce a specific value of the boundary condition. This leads to considering the domain where the boundary controls apply to the solution of the IBVP (introduced in [17] for the specific case of a Burgers flux).

**Definition 6:** Let us denote  $s_{\min}, s_{\max}$  the minimal and maximal speed of the waves composing the solution to the Riemann problem at the boundary. The *control space* at the left boundary is the set of pairs  $(u_l, u_r)$  such that either no wave is generated by the Riemann problem ( $u_l = u_r$ ), or  $s_{\min} \geq 0$  and  $s_{\max} > 0$ . The *control space* at the right boundary is the set of pairs  $(u_l, u_r)$  such that either no wave is generated by the Riemann problem ( $u_l = u_r$ ), or  $s_{\min} < 0$  and  $s_{\max} \leq 0$ .

Definition 4 from Section II-B2 and definition 6 are compatible. Definition 4 is a weak formulation that characterizes the couples boundary condition-boundary trace prevailing for non-zero time durations. Definition 6 categorizes the couples boundary conditions-boundary trace, potentially existing for zero time durations, leading to the boundary trace instantaneously taking the value of the boundary condition (see Figs. 1 and 2).

**Proposition 2:** Let  $m$  denote the minimizer of the strictly convex flux function  $f$ . The control spaces  $\mathcal{C}_a, \mathcal{C}_b$  at the left and

right boundaries, respectively, are characterized as the set of pairs  $(u_l, u_r)$  such that one of the following properties is satisfied:

$$\mathcal{C}_a \doteq (u_l, u_r) \text{ s.t. } \begin{cases} u_l = u_r \\ u_l \geq m \text{ and } u_r \geq m \\ u_l \geq m \text{ and } u_r \leq m \text{ and } f(u_l) > f(u_r) \end{cases} \quad (21)$$

$$\mathcal{C}_b \doteq (u_l, u_r) \text{ s.t. } \begin{cases} u_l = u_r \\ u_l \leq m \text{ and } u_r \leq m \\ u_l \geq m \text{ and } u_r \leq m \text{ and } f(u_l) < f(u_r). \end{cases} \quad (22)$$

*Proof:* Following Definition 6, we characterize the cases in which the solution to the Riemann problem with initial datum  $(u_l, u_r)$  exhibits no wave [first line of (21) and (22)], or waves entering the domain, with at least one non-characteristic wave speed. The second line of (21) and (22) corresponds to entering shock waves or rarefaction waves arising between left and right states with characteristic speed of the same sign, and the third line corresponds to the case of shock waves entering the domain arising between left and right states with characteristic speed of opposite sign. ■

One may note that in Proposition 2, the term  $u_l$  corresponds to the boundary condition at boundary  $a$  and to the boundary trace at boundary  $b$ . Similarly the term  $u_r$  corresponds to the boundary trace at boundary  $a$  and to the boundary condition at boundary  $b$ .

A graphical representation of the control space for the left boundary  $a$  is presented in Fig. 2, in the case of the Burgers flux, i.e., a quadratic convex flux with minimum at 0. Cases for which the minimum is not zero can be retrieved by translation. For a general smooth strictly convex flux, a similar representation is obtained with lines replaced by curves in the figure. Fig. 2 illustrates the following distinct interactions between the boundary condition, or control, and the boundary trace, or observed value.

- In the domain of weak boundary conditions with negative wave speed arising at the boundary (white zone on the left of vertical axis), the control does not apply. If the upstream value  $u(t, a)$  is observed, and a control is applied such that the couple  $u(t, a), u_a(t)$  is represented by the point  $A$ , no actuation happens. The trace  $u(t, a)$  does not change, it is not impacted by the control chosen. Similarly, no actuation is possible at points  $B$  and  $C$ , and in general in the left white zone.
- In the top right quadrant and upper part of top left quadrant of the control space (striped zone), corresponding to line 2 and 3 of (21) respectively, a control action applies; the trace  $u(t, a)$  of the solution takes the control value. If a control is applied to a boundary trace value such that the pair is represented by the point  $D$ , the trace instantaneously takes the value of the control and the resulting configuration is the projection of  $D$  onto the first bisector. Similar behavior occurs with the points  $E$  and  $F$ , which belong to the control space. The part of the bottom left quadrant such that the control and the trace of the solution are equal is also part of the strong boundary conditions domain according to definition 6 and its characterization in Proposition 2.
- In the bottom right quadrant, any control action yields a vanishing boundary trace, which is illustrated in the case

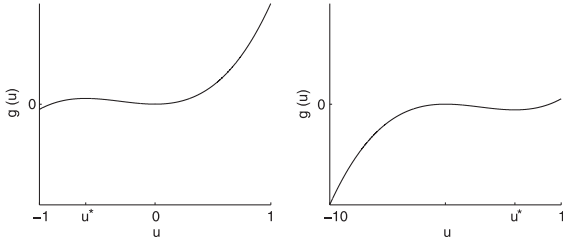


Fig. 3. Representation of the variations of  $g$ : for a Burgers flux function  $f$  in the case  $u^* < 0$  (left) and in the case  $u^* > 0$  (right). The points  $u = m$  ( $m = 0$  in this case) and  $u = u^*$  ( $u^* = \pm 0.5$  in this case) are local extrema of  $g$ .

of the application of a control  $u_a(t)$  such that the couple  $(u(t, a), u_a(t))$  is represented by the point  $G$ . The trace of the solution  $u(t, a)$  takes the value 0, as illustrated by a horizontal projection onto the axis  $x = 0$ . The control has an action, but not the one intended (i.e., applied), thus the bottom right quadrant is not part of the control space (see Definition 6).

Using the characterization of the control space introduced in this section, we show in the following section that the system is stabilizable.

## B. Lyapunov Stabilization

In this section, we prove that there exist boundary conditions in the control space (21), (22) such that the candidate Lyapunov function (15) is strictly decreasing.

**Lemma 3:** Let  $g : u \mapsto (u - u^*) f(u) - F(u)$ , with  $f$  a smooth strictly convex function, and  $F$  a primitive of  $f$ . Let  $m$  denote the minimum of  $f$ . The function  $g$  is smooth on the real line, and satisfies the following properties:

- $g$  is strictly increasing in  $(-\infty, \min(m, u^*))$ , strictly decreasing in  $(\min(m, u^*), \max(m, u^*))$ , and strictly increasing in  $(\max(m, u^*), +\infty)$ .
- For  $u > v$  such that  $f(u) = f(v)$ , we have  $g(u) > g(v)$ .

*Proof:* The fact that  $g$  is smooth results from the smoothness of  $f$ . The first property is obtained by computing the derivative  $g'(u) = (u - u^*) f'(u)$  of  $g$ , and noting that  $f$  is strictly convex with minimum at  $m$ . To prove the second property, let us consider  $u > v$  such that  $f(u) = f(v)$ . The difference  $g(v) - g(u)$  reads  $g(v) - g(u) = F(u) - F(v) + (v - u) f(u)$  that is strictly negative by strict convexity of  $f$ . ■

The function  $g$  is represented for the case of the Burgers flux function in Fig. 3 with the arbitrary choice of  $g(m) = 0$ .

**Theorem 4:** Let  $V(\cdot)$  denote the candidate Lyapunov function (15) for the PDE (1). There exist boundary conditions  $u_a(\cdot), u_b(\cdot)$  in the control spaces (21), (22), respectively, such that the following holds. If the corresponding solution to the IBVP is in the class  $\text{PWS}^+$  then the function  $V(\cdot)$  is strictly decreasing, thus the solution is stable in the sense of Lyapunov.

*Proof:* We show that at any given time  $t > 0$ , it is always possible to choose controls  $u_a(t), u_b(t)$  in the control space such that there holds  $g(u(t+, a)) < g(u(t+, b))$ . We consider the case of  $u^* < m$ , and recall that the derivation below correspond to the case of a strictly convex flux.

- If  $u(t, a) \geq m$  and  $u(t, b) > m$  then any boundary condition  $u_a(t) \geq m$  is in the upstream control space. Since  $g$  is strictly increasing in  $[m; \infty)$ , with  $u_b(t) = u(t, b)$ , it

is possible to obtain the strict decrease of the Lyapunov function by choosing  $u_a(t)$  in  $[m, u(t, b)[$ .

- If  $u(t, a) \geq m$  and  $u(t, b) \leq m$  then any boundary conditions  $u_a(t) \geq m, u_b(t) \leq m$  are in the control space. Since  $g$  is decreasing in  $[u^*, m]$  it is possible to choose boundary controls in the control space that guarantees  $g(u_a(t)) < g(u_b(t))$ , e.g.  $u_a(t) = m, u_b(t) = u^*$ .
- If  $u(t, a) < m$  and  $u(t, a) \neq u^*$  and  $u(t, b) \leq m$  any boundary condition  $u_b(t) \leq m$  is in the downstream control space. Since  $u^*$  is a local maximum of  $g$ , it is possible to obtain the strict decrease of the Lyapunov function.
- If  $u(t, a) = u^*$  and  $u(t, b) \leq m$  the choice  $u(t, b) = u^*$  gives a neutral effect of the boundary terms on the Lyapunov function. By assumption we know that the solution  $u$  is in  $\text{PWS}^+$ , hence in this case either the solution is identically equal to  $u^*$  or contains shock waves which yields a strictly decreasing Lyapunov function.
- If  $u(t, a) < m$  and  $u(t, b) > m$ ,
  - If  $g(u(t, a)) < g(u(t, b))$  the choice  $u_a(t) = u(t, a)$  and  $u_b(t) = u(t, b)$  in the control space leads to the strict decrease of the Lyapunov function.
  - If  $g(u(t, a)) \geq g(u(t, b))$  and  $u(t, a) \neq u^*$ , since  $u^*$  is a local maximum of  $g$  and according to second result of lemma 3, it is possible to pick  $u_b(t) \leq m$  such that  $f(u_b) > f(u(t, b))$  and  $g(u_b) > g(u(t, a))$ .
  - If  $g(u(t, a)) \geq g(u(t, b))$  and  $u(t, a) = u^*$ , the choice  $u_b(t) = u^*$  is in the downstream control space and yields a neutral effect of the boundary terms. Similarly to above, by assumption on the regularity of the solution, we have either the solution identically equal to  $u^*$  or the Lyapunov function strictly decreasing.

The case  $u^* > m$  can be treated similarly. The case  $u^* = m$  can be treated similarly, however involves greater reliance on the internal dynamics. Specifically internal dynamics are the sole contributor to the decrease of the Lyapunov function in the Case 2 and 4 above, and the controller is passive (equal to the boundary trace) in the Case 5 above. ■

**Remark 4:** The set of boundary values  $(u_a(t), u_b(t))$  which guarantee stabilization, as described in the proof of Theorem 4 (in the case  $u^* < m$ ), is defined as follows:

$$\left\{ \begin{array}{ll} [m, u(t, b)) \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (m, +\infty) \\ (m, +\infty) \times (-\infty, m) & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (-\infty, m] \\ \text{s.t. } g(u_a(t)) < g(u_b(t)) \\ \{u(t, a)\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (-\infty, m] \\ \{u(t, a)\} \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (m, +\infty) \\ & \text{and } g(u(t, a)) < g(u(t, b)) \\ \{u(t, a)\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (m, +\infty) \\ & \text{and } g(u(t, a)) \geq g(u(t, b)). \end{array} \right. \quad (23)$$



TABLE I  
UPSTREAM BOUNDARY: ADMISSIBLE BOUNDARY CONTROLS  
AND CORRESPONDING WAVE CREATED AT THE UPSTREAM  
BOUNDARY BASED ON THE VALUE OF THE TRACE OF  
THE SOLUTION AT THIS BOUNDARY

	$u(t, a) < m$	$u(t, a) \geq m$
$u_a \geq m$	$f(u_a) > f(u(t, a))$ : Shock	$u_a > u(t, a)$ : Shock  $u_a = u(t, a)$ : No wave $u_a < u(t, a)$ : Rarefaction wave
$u_a < m$	$u_a = u(t, a)$ : No wave	$u_a \in \emptyset$  Rarefaction with vanishing boundary trace

We highlight that the boundary values (23) only provide stability, and not asymptotic stability in general. In the following section we instantiate a greedy controller which maximizes the instantaneous decrease of the Lyapunov function, and also illustrate that the greedy controller may fail to provide asymptotic stability.

In Section VII we then design an improved controller which guarantees asymptotic stability and we show that the solution resulting from these boundary controls and an initial condition in the class  $PWS^+$  remains in  $PWS^+$ .

## VI. MAXIMIZING INSTANTANEOUS LYAPUNOV FUNCTION DECREASE RATE

In this section, we characterize the values of the control, in the control space, that minimize the Lyapunov function derivative. Since boundary controls introducing a shock wave contribute with a negative term to the internal dynamics, we propose to first characterize the type of wave introduced in specific regions of the control space.

### A. Nature of the Waves Created by Boundary Control

The type of wave created at the boundary impacts the value of the derivative of the Lyapunov function. In the scalar case, the type of wave arising is defined by the Lax entropy condition (9). This allows us to partition the control space according to the type of wave introduced by the control. Table I summarizes for the upstream boundary the cases in which the boundary control belongs to the control space, with mention of the type of wave introduced.

From Proposition 1, we have that the internal dynamics resulting from the existence of entropic shock waves contributes to the decrease of the Lyapunov function. Here we characterize the benefits of the change in the number of shock waves in the solution, resulting from internal interaction, and entrance or exit of a discontinuity at the boundary.

**Proposition 3:** At a time  $t$  at which the number of jump discontinuities  $N(t)$  changes:

- If two shock waves interact, the derivative of the Lyapunov function decreases.
- If a discontinuity crosses the left boundary, let us note  $u^-$  the value of the boundary trace at time  $t^-$  and  $u^+$  the value of the boundary trace at time  $t^+$ . The jump in the derivative of the Lyapunov function reads

$$\begin{aligned} S(u^-, u^+) &\doteq \frac{dV}{dt}(t^+) - \frac{dV}{dt}(t^-) \\ &= (f(u^+) - f(u^-)) \frac{\tilde{u}^- + \tilde{u}^+}{2} \end{aligned} \quad (24)$$

in which the term  $(f(u^+) - f(u^-))$  can be checked to be always positive for a convex flux and always negative for a concave flux. Hence the jump in the derivative of the Lyapunov function depends on the sign of  $-(\tilde{u}^- + \tilde{u}^+)/2 = u^* - (u^- + u^+)/2$ :

- If  $u^* - (u^- + u^+)/2 < 0$ , entering and exiting shocks increase the derivative of the Lyapunov function in the case of a convex flux and decrease the derivative of the Lyapunov function in the case of a concave flux.
  - If  $u^* - (u^- + u^+)/2 > 0$ , entering and exiting shocks decrease the derivative of the Lyapunov function in the case of a convex flux and increase the derivative of the Lyapunov function in the case of a concave flux.
- The case of right boundary can be treated similarly changing the sign in (24).

*Proof:* The result is proven in the Appendix. ■

In the following section, we leverage these results to design a stabilizing boundary controller that maximizes the instantaneous decrease rate of the Lyapunov function.

### B. Greedy Boundary Control

The boundary control that maximizes the decrease rate of the Lyapunov function is the boundary control in the control space, that either introduces a rarefaction wave and minimizes the jump in the Lyapunov function derivative (18), or introduces a shock wave at the boundary and minimizes the jump in the Lyapunov function derivative resulting from the change in the boundary trace and in the number of shock waves (24). The corresponding optimization problem can be formulated as follows.

**Proposition 4:** Let  $u$  denote the solution to the IBVP associated with the scalar conservation law (1). The upstream boundary control  $u_a^r$  and downstream boundary control  $u_b^r$  that minimize the decrease of the Lyapunov function by introducing rarefaction waves or no waves at the boundary can be obtained by solving

$$\begin{aligned} u_a^r &\doteq \arg \min_{\{u|(u, u(t, a)) \in \mathcal{C}_a \text{ and } u \leq u(t, a)\}} g(u) \\ u_b^r &\doteq \arg \max_{\{u|(u(t, b), u) \in \mathcal{C}_b \text{ and } u \geq u(t, b)\}} g(u). \end{aligned}$$

The upstream boundary control  $u_a^s$  and downstream boundary control  $u_b^s$  that minimize the decrease of the Lyapunov function by introducing discontinuities at the boundary, can be obtained by solving

$$\begin{aligned} u_a^s &\doteq \arg \min_{\{u|(u, u(t, a)) \in \mathcal{C}_a \text{ and } u > u(t, a)\}} S(u(t, a), u) \\ u_b^s &\doteq \arg \max_{\{u|(u(t, b), u) \in \mathcal{C}_b \text{ and } u < u(t, b)\}} S(u(t, b), u). \end{aligned}$$

*Proof:* This results from the characterization of the cases when the boundary control introduces a rarefaction wave or a shock wave, and the previous analysis on the resulting evolution of the Lyapunov function derivative. ■

Based on the expressions from Proposition 4 and using formula (23), we exhibit a greedy boundary control  $(u_a(t), u_b(t))$

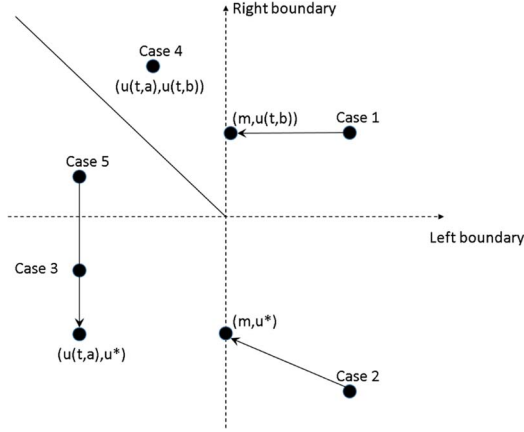


Fig. 4. **Greedy stabilizing controller**: in the case of a quadratic convex flux centered at 0, for  $u^* < m$ . The cases correspond to the rows of the controller expression in equation (25).

maximizing the instantaneous decrease of the Lyapunov function, reading as follows (for the case  $u^* < m$ ):

$$\left\{ \begin{array}{ll} \{m\} \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (m, +\infty) \\ \{m\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (-\infty, m] \\ \{u(t, a)\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (-\infty, m] \\ \{u(t, a)\} \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (m, +\infty) \text{ and } g(u(t, b)) > g(u^*) \\ \{u(t, a)\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (m, +\infty) \text{ and } g(u(t, b)) \leq g(u^*) \end{array} \right. \quad (25)$$

and the action of the controller are illustrated in Fig. 4. While the greedy controller (25) maximizes the instantaneous decrease of the Lyapunov function, we illustrate in the following example that asymptotic stability may not be obtained. We also illustrate the naive *brute force* control ( $u_a(t) = u^*$ ,  $u_b(t) = u^*$ ) may create oscillations at the boundary, in the form of infinite variation in time of the solution trace.

**Example 1:** Without loss of generality, we choose  $u^* < m$  and define  $\hat{u}$  by  $u^* < m < \hat{u}$  and  $f(\hat{u}) = f(u^*)$ . Given  $0 < \Delta < (a+b)/2$ , such that that  $((b-a)/4\Delta) \in \mathbb{N}$ , and  $0 < k < \hat{u}$  we consider the following initial datum on  $(a, b)$ :

$$u_0(x) = \begin{cases} m & \text{if } x \in (a, \frac{a+b}{2}) \\ \hat{u} - k & \text{if } x \in (\frac{a+b}{2} + (2p)\Delta, \frac{a+b}{2} + (2p+1)\Delta) \\ & p \in \{0, \dots, \frac{b-a}{4\Delta} - 1\} \\ \hat{u} + k & \text{if } x \in (\frac{a+b}{2} + (2p+1)\Delta, \frac{a+b}{2} + (2p+2)\Delta) \\ & p \in \{0, \dots, \frac{b-a}{4\Delta} - 1\}. \end{cases}$$

This case corresponds to the first row of equation (25), hence the applied boundary controls is ( $u_a(t) = m$ ,  $u_b(t) = u(t, b)$ ). Since the characteristic speed of  $m$  is zero, the right boundary value converges towards  $m$  only in infinite time, hence the system remains in the configuration characterized by the first row of equation (25), and converges to the steady state  $m$  over the interval  $(a, b)$ , not reaching the target  $u^* < m$ . Hence we have stability but not asymptotic stability.

For the same example, one may note that the brute force control ( $u_a(t) = u^*$ ,  $u_b(t) = u^*$ ) has no action on the system when

$u(t, b) = \hat{u} + k$  since the control values are outside of the control space. While when  $u(t, b) = \hat{u} - k$ , the brute force control induces slow backward moving shock waves ( $\hat{u} - k, u^*$ ) from the right boundary which interact with fast forward moving shock waves ( $\hat{u} + k, \hat{u} - k$ ) coming from the initial datum, and create slow forward moving shock waves ( $\hat{u} + k, u^*$ ), hence we observe large oscillations at the right boundary (irrespective of the size of the oscillations in the initial datum). More precisely, the trace at the boundary  $x = b$  oscillates between the value  $u^*$  and values in the interval  $[\hat{u} - k, \hat{u} + k]$ , generating a total variation in time which satisfies:  $TV_t(u_b) \geq ((b-a)/4\Delta)(\hat{u} - k - u^*)$ . Since  $\Delta$  is arbitrary this oscillation can not be bounded from above, even for  $k$  arbitrarily small. In other words, we can produce arbitrarily big oscillations with initial data  $u_0$  of uniformly bounded variation in space. Eventually all the waves generating by oscillating initial datum exit the domain and the naive control produces backward moving shock waves ( $m, u^*$ ) which yield convergence.

In the following section we present an improved controller providing Lyapunov asymptotic stability.

## VII. LYAPUNOV ASYMPTOTIC STABILITY

In this section we design an improved controller which guarantees Lyapunov asymptotic stability. We first define a feedback control (depending only on the trace at boundary of the unknown) in Section VII-A, and show, in Theorem 5, that the associated solution to the corresponding IBVP remains in the class  $PWS^+$  for initial data  $u_0$  in the same class. The latter result allows to provide, in Theorem 6, BV estimates for the solution and the boundary controls. Finally, in Theorem 7, we use the BV estimates to extend the construction to BV initial data and prove Lyapunov asymptotic stability.

### A. Controller Design

The asymptotic convergence issue highlighted in the Example 1 stems from the fact that if the system reaches a configuration corresponding to the first row of (25), given the prescribed control values, it may remain in that configuration, which grants stability but prevents asymptotic stability for  $u^* < m$ .

Without loss of generality, we focus on the case  $u^* < m$ . We define  $\hat{u} > m$  by  $f(\hat{u}) = f(u^*)$ ,  $\tilde{u} > m$  by  $g(\tilde{u}) = g(u^*)$  and  $\bar{u} = (\hat{u} + \tilde{u})/2$ . By Lemma 3, we deduce that  $\tilde{u} < \hat{u}$  and thus  $\tilde{u} < \bar{u} < \hat{u}$ . The specific choice of  $\bar{u}$  will guarantee the decrease of  $V(\cdot)$  (as it would any other control chosen in the interval  $]\tilde{u}, \hat{u}[$ ). We propose to define the controller ( $u_a(t)$ ,  $u_b(t)$ ) at any time  $t$  as a function of the pair of boundary traces of the solution ( $u(t, a)$ ,  $u(t, b)$ ), i.e.,  $u_a(t) = u_a(u(t, a), u(t, b))$  and  $u_b(t) = u_b(u(t, a), u(t, b))$  according to the following rules:

$$\left\{ \begin{array}{ll} \{m\} \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (\bar{u}, +\infty) \\ \{m\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in [m, +\infty) \\ & \times (-\infty, \bar{u}] \\ \{u(t, a)\} \times \{u^*\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (-\infty, \bar{u}] \\ \{u(t, a)\} \times \{u(t, b)\} & \text{if } (u(t, a), u(t, b)) \in (-\infty, m) \\ & \times (\bar{u}, +\infty). \end{array} \right. \quad (26)$$

One may note that with this definition, similarly to the case of the definition (25), the type of boundary controls provided are feedback type boundary control since they depend only on the trace of the unknown at the boundaries, whereas the “non-local” boundary controls defined below in (31) and (32) depend also on the initial state.

### B. Existence of Solution for Asymptotically Stabilizing Controller

To apply Theorem 4, we need to define boundary controls  $u_a, u_b$ , which will guarantee the solution to the corresponding IBVP to remain in the class  $PWS^+$  for initial data  $u_0$  in the same class. We prove such result for the boundary control providing asymptotic stability of the Lyapunov function (15). For simplicity, we assume  $u^* < m$  being the other case similar.

**Theorem 5:** Consider an initial datum  $u_0$  in  $PWS^+$  and the boundary controls given by formula (26). Then, the corresponding IBVP admits a unique solution which is in the class  $PWS^+$  for all times. Moreover, the function  $V(\cdot)$  is strictly decreasing, thus the solution is stable in the sense of Lyapunov.

*Proof:* We first show that for  $u_0$  in  $PWS^+$ , the boundary controls are well defined and piecewise smooth in time. Moreover, the solution remains in the class  $PWS^+$ .

First, we enumerate the following cases:

- Case 1:  $u(t, a) \geq m, u(t, b) > \bar{u}$ .
- Case 2:  $u(t, a) \geq m, u(t, b) \leq \bar{u}$ .
- Case 3:  $u(t, a) < m, u(t, b) \leq \bar{u}$ .
- Case 4:  $u(t, a) < m, u(t, b) > \bar{u}$ .

In Case 1, the boundary controls generate a rarefaction wave from the left boundary, no wave on the right boundary and the traces verify  $u(t+, a) = m$  and  $u(t+, b) = u(t, b) > \bar{u} > m$  (where  $u(t+, \cdot)$  indicates the limit at time  $t$  from the above).

In Case 2, the boundary controls generate a rarefaction wave from the left boundary, a rarefaction wave or a shock from the right boundary and the traces verify  $u(t+, a) = m$  and  $u(t+, b) = u^*$ .

In Case 3, the boundary controls generate no wave from the left boundary, a rarefaction wave or a shock on the right boundary and the traces verify  $u(t+, a) = u(t, a) < m$  and  $u(t+, b) = u^*$ .

In Case 4, the boundary controls generate no wave from the left and right boundary and the traces verify  $u(t+, a) = u(t, a) < m$  and  $u(t+, b) = u(t, b) > \bar{u} > m$ .

From this analysis, we verify that the control is well defined for constant traces and the corresponding solution remains in the class  $PWS^+$ . We are left to verify that the solution is well defined and remains in the same class for waves interacting with the boundary and we proceed again by cases.

In Case 1: if a wave interacts with the left boundary, then no wave is produced, while for the right boundary a shock may arise and we transition to Case 2. In Case 2: if a wave interacts with the left or right boundary, then no wave is produced and we transition to Case 1 or Case 3. In Case 3: if a wave interacts with the left or right boundary, then no wave is produced and we remain in Case 3 or transition to Case 4. In Case 4: if a wave interacts with the left boundary, then no wave is produced, while for the right boundary a shock may arise and we transition to Case 3. This concludes the analysis of interacting waves.

Since  $\tilde{u} < \bar{u} < \hat{u}$ , the controls (26) satisfy the conditions given in the proof of Theorem 4. In particular, the choice of  $\tilde{u}$  guarantees that  $g(u(t+, a)) < g(u(t+, b))$  when the control is

defined according to the fourth line of (26). Then we conclude that  $V(\cdot)$  is strictly decreasing. ■

In order to extend our results to initial data  $u_0$  in BV (and not necessarily in  $PWS^+$ ) we provide estimates on the total variation in time of the controls  $TV_t(u_a), TV_t(u_b)$ , and in space of the generated solution  $TV_x(u(t, \cdot))$ .

**Theorem 6:** Consider an initial datum  $u_0$  in  $PWS^+$ , the boundary controls given by formula (25) and let us indicate by  $u(t, x)$  the corresponding solution. Then, defining  $C = 2(\sup_x |u_0(x) - m| + |m - u^*|)$ , we have the following estimates:

$$TV_x(u(t, \cdot)) \leq TV_x(u_0) + C + |\bar{u} - u^*| \quad (27)$$

$$TV_t(u_a) \leq TV_x(u_0) + C \quad (28)$$

$$TV_t(u_b) \leq TV_x(u_0) + C + |\bar{u} - u^*| \cdot \frac{TV_x(u_0) + C}{|\bar{u} - \hat{u}|}. \quad (29)$$

*Proof:* Let us start showing that

$$TV_x(u(0+, \cdot)) \leq TV_x(u_0) + C. \quad (30)$$

We consider cases 1, 2, 3, and 4 as in the proof of Theorem 5. In case 1 a wave is generated from the left boundary of strength  $|u(t, a) - m|$ ; in Case 2, a wave is generated from the left boundary of strength  $|u(t, a) - m|$  and a wave from the right boundary of strength  $|u(t, b) - u^*| \leq |u(t, b) - m| + |m - u^*|$ ; in Case 3 a wave is generated from the right boundary of strength  $|u(t, b) - u^*|$ ; in Case 4 no wave is generated from the boundaries. We thus obtained the desired estimate.

We now pass to the other estimates dealing with wave interactions by cases as in the proof of Theorem 5. We use the symbol  $\Delta$  to indicate the change in total variation due to the interaction. For instance if  $\bar{t} > 0$  is the interaction time of a wave then  $\Delta TV_t(u_a) = TV_t(u_a; [0, \bar{t}]) - TV(u_a; [0, \bar{t}])$ .

In Case 1 if a wave  $(u(t, a), \tilde{u})$  interacts with the left boundary, then, for the wave to have negative speed, we must have  $\tilde{u} < m = u(t, a)$ . Therefore no wave is generated from the boundaries and we transition to Case 4. Moreover, we get  $\Delta TV_x(u(t, \cdot)) = -|u(t, a) - \tilde{u}| < 0$ , as well as  $\Delta TV_a = |u(t, a) - \tilde{u}|, \Delta TV_b = 0$ . In Case 1 if a wave  $(\tilde{u}, u(t, b))$  interacts at time  $\bar{t}$  with the right boundary, then we distinguish two cases. If  $\tilde{u} > \bar{u}$  no wave is generated, we remain in Case 1 and we get  $\Delta TV_x(u(t, \cdot)) = -|u(t, b) - \tilde{u}| < 0$ , as well as  $\Delta TV_b = |u(t, b) - \tilde{u}|, \Delta TV_a = 0$ . Otherwise, if  $m \leq \tilde{u} \leq \bar{u}$ , then the shock  $(\tilde{u}, u^*)$  is generated from the right boundary, we transition to Case 2 and we get

$$\begin{aligned} \Delta TV_x(u(t, \cdot)) &= |u^* - \tilde{u}| - |u(t, b) - \tilde{u}| \leq |\bar{u} - u^*| \\ \Delta TV_t(u_a) &= 0 \\ \Delta TV_t(u_b) &= |u(t, b) - u^*| \leq |u(t, b) - \tilde{u}| + |\tilde{u} - u^*| \\ &\leq TV_x(u(\bar{t}-, \cdot)) + |\bar{u} - u^*|. \end{aligned}$$

In Case 2 if a wave  $(u(t, a), \tilde{u})$  interacts with the left boundary, then no wave is generated from the boundaries and we transition to Case 3. Moreover we have, as for the Case 1  $\Delta TV_x(u(t, \cdot)) = -|u(t, a) - \tilde{u}| < 0$ , as well as  $\Delta TV_a = |u(t, a) - \tilde{u}|, \Delta TV_b = 0$ . In Case 2 if a wave  $(\tilde{u}, u(t, b))$  interacts at time  $\bar{t}$  with the right boundary, then, for the wave to have positive speed, we must have  $\tilde{u} > \hat{u} > \bar{u}$ . Thus no wave is generated and we transition to Case 1. Moreover, we get  $\Delta TV_x(u(t, \cdot)) = -|u(t, b) - \tilde{u}| < 0, \Delta TV_b = |u(t, b) - \tilde{u}|, \Delta TV_a = 0$ . For Case 3 we have the same analysis as Case 2. More precisely, if a wave interacts with the left boundary no wave is generated and we remain in Case 3, while if a wave interacts with the right

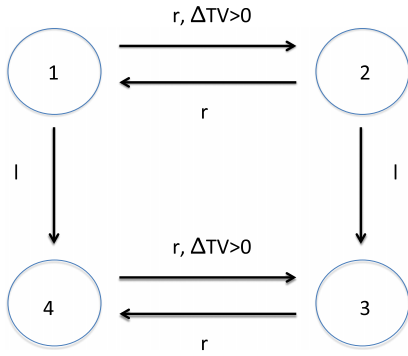


Fig. 5. Graphical representation of transitions between cases 1 to 4. The arrow labels indicate: the boundary reached by the interacting wave,  $l$  for left and  $r$  for right, and  $\Delta TV > 0$  if the total variations may increase. Transitions from a case to itself are not represented for simplicity.

boundary then no wave is generated and we transition to Case 4. Moreover we get the same estimates for the total variations.

In Case 4 if a wave  $(u(t, a), \tilde{u})$  interacts with the left boundary, then, for the wave to have negative speed, we must have  $\tilde{u} < m$ . Therefore no wave is generated from the boundaries and we remain in Case 4. Moreover, we get  $\Delta TV_x(u(t, \cdot)) = -|u(t, a) - \tilde{u}| < 0$ , as well as  $\Delta TV_a = |u(t, a) - \tilde{u}|$ ,  $\Delta TV_b = 0$ . In Case 1 if a wave  $(\tilde{u}, u(t, b))$  interacts at time  $\bar{t}$  with the right boundary, then we distinguish two cases. If  $\tilde{u} > \bar{u}$  no wave is generated, we remain in Case 4 and we get  $\Delta TV_x(u(t, \cdot)) = -|u(t, b) - \tilde{u}| < 0$ , as well as  $\Delta TV_b = |u(t, b) - \tilde{u}|$ ,  $\Delta TV_a = 0$ . Otherwise, if  $\tilde{u} \leq \bar{u}$ , then the shock  $(\tilde{u}, u^*)$  is generated from the right boundary, we transition to Case 3 and we get

$$\begin{aligned} \Delta TV_x(u(t, \cdot)) &= |u^* - \tilde{u}| - |u(t, b) - \tilde{u}| \leq |\bar{u} - u^*| \\ \Delta TV_t(u_a) &= 0 \\ \Delta TV_t(u_b) &= |u(t, b) - u^*| \leq |u(t, b) - \tilde{u}| + |\tilde{u} - u^*| \\ &\leq TV_x(u(\bar{t}^-, \cdot)) + |\bar{u} - u^*|. \end{aligned}$$

The results of the estimates are summarized in Fig. 5. It is easy to notice that transitions from Cases 1, 2 to Cases 3, 4 are irreversible. Therefore, multiple increases in total variation can occur only for transitions 1-2-1 (that is from Case 1 to Case 2 and then back to Case 1) and for transitions 4-3-4. We prove estimates for the transitions 1-2-1, being the Case 4-3-4 entirely similar. We denote by  $(\tilde{u}_1, u_b^1)$  the interacting wave for transition 1-2 and by  $(\tilde{u}_2, u_b^2 = u^*)$  the interacting wave for the transition 2-1. Notice that  $m \leq \tilde{u} \leq \bar{u} < u_b^1$  and  $\bar{u} < \hat{u} < \tilde{u}_2$ . Again we use the symbol  $\Delta$  to indicate the change in total variations before and after the transition 1-2-1. Using the above estimates, we get

$$\begin{aligned} \Delta TV_x(u(t, \cdot)) &= |u^* - \bar{u}| - |\tilde{u}_2 - u_b^2| \leq |u^* - \bar{u}| - |\hat{u} - \bar{u}| \\ &\leq -|\hat{u} - \bar{u}| < 0. \end{aligned}$$

In other words, each transition 1-2-1 (and similarly 4-3-4) gives rise to a decrease of  $TV_x(u(t, \cdot))$  which is bounded away from zero. Therefore, we deduce that  $TV_x(u(t, \cdot))$  is bounded and transitions 1-2-1 can occur only a finite number of times (namely  $(TV(u(0+, \cdot)))/|\hat{u} - \bar{u}|$ ). Combining this result with the estimates of Cases 1, 2, 3 and 4 and (30), we get the estimates (27)–(29). ■

We are now ready to state last theorem of this section:

**Theorem 7:** Consider an initial datum  $u_0$  in  $BV$  and the boundary controls given by formula (26), then there exists

a unique entropic solution to the corresponding IBVP problem. Moreover, estimates (27)–(29) hold true. Finally we have  $\lim_{t \rightarrow +\infty} V(t) = 0$ , i.e.,  $\lim_{t \rightarrow +\infty} \|u(t, \cdot) - u^*\|_{L^2} = 0$ .

*Proof:* Consider an approximating sequence  $u_0^n$  of  $u_0$  such that  $u_0^n \in PWS^+$  and  $TV(u_0^n) \leq TV(u_0)$ . Applying Theorem 5, we get the existence of entropic solutions  $u^n(t, x)$  to the corresponding IBVP problems. Moreover, estimates (27)–(29) hold true for  $u^n$ . By Helly Theorem, there exists a subsequence of  $u^n$  such that the solution  $u^n$  and the corresponding boundary controls  $u_a^n(t)$  and  $u_b^n(t)$  converge strongly in  $L^1$  to some limit  $w$ ,  $w_a$  and  $w_b$ . Moreover, estimates (27)–(29) hold true. Therefore, for almost every  $t$  we get that  $w_a(t) = u_a(w(t, a+), w(t, b-))$  and  $w_b(t) = u_b(w(t, a), w(t, b))$  [according to formula (26)]. We conclude that  $w$  is a solution to the IBVP with initial condition  $u_0$  and boundary controls given by formula (26). Uniqueness follows from standard theory for IBVP.

Because of estimates (28) and (29), there exist the asymptotic limits of boundary controls  $w_a^\infty = \lim_{t \rightarrow +\infty} w_a(t)$  and  $w_b^\infty = \lim_{t \rightarrow +\infty} w_b(t)$ . From formula (26), we deduce that  $w_a^\infty \leq m$ . Similarly, we must have  $w_b^\infty = u^*$  or  $w_b^\infty > \bar{u}$ . In all cases the solution  $w$  to the IBVP, for  $t$  sufficiently large, will attain the boundary values, so solve the conservation law on the whole real line.

Now, if  $w_a^\infty \geq w_b^\infty$  then  $w_b^\infty = u^*$  and we can apply Theorem 2 of [61], thus the solution decays to the traveling shock  $(w_a^\infty, w_b^\infty)$ . However, this traveling shock has negative speed unless  $w_a^\infty = w_b^\infty = u^*$ . Thus we conclude that  $V(t)$  tends to 0.

Otherwise, if  $w_a^\infty < w_b^\infty$  then we can apply Theorem 4 of [61] and deduce that  $w$  decays to an  $N$ -wave formed by two shocks enclosing the rarefaction  $(w_a^\infty, w_b^\infty)$ . If the first shock has positive speed, then the solution  $w$  tends uniformly to  $w_a^\infty$  and we conclude as before. Similarly, if the second shock has negative speed, then the solution  $w$  tends uniformly to  $w_b^\infty$  and conclude as before. Finally, if the first shock has negative speed and the second positive speed then they asymptotically exit the domain  $[a, b]$  and the solution  $w$  decays to the rarefaction  $(w_a^\infty, w_b^\infty)$ . Now, if  $w_b^\infty > \bar{u}$  then, for  $t$  sufficiently big, the characteristics with positive speed corresponding to values of the solution  $u$  in the interval  $[m, \bar{u}]$  will reach the right boundary. But this contradicts the definition of  $w_b^\infty$  as limit of boundary controls given by (26) and the fact that the solution attains the boundary value for sufficiently large  $t$ . Therefore  $w_b^\infty = u^*$ . The rarefaction  $(w_a^\infty, w_b^\infty)$  is then encompassed of characteristics with negative speed, thus exit the domain, unless  $w_a^\infty = w_b^\infty = u^*$ . Thus we conclude that  $V(t)$  tends to 0 also in this case. ■

### C. Non-Local Controls

As we noticed the greedy control may not stabilize the system to  $u^*$ , while the brute force control  $u_a \equiv u_b \equiv u^*$  may overshoot (and not be in the control space) and produce oscillations. Finally, control (26) stabilizes the system, but the stabilization time can be far from optimal (and the same is for the brute force ones). Therefore, in this Section, we show a *nonlocal* control  $u_{a,b}^{nl}$  which fast stabilizes the system to  $u^*$ . We use the term nonlocal to indicate that this control will depend not only on the values of the traces  $u(t, a)$  and  $u(t, b)$ .

We focus again, for simplicity, on the case  $u^* < m$ . Let  $A = \sup_{x \in [a,b]} u_0(x)$  and  $\hat{A} < m$  be such that  $f(\hat{A}) = f(A)$ .

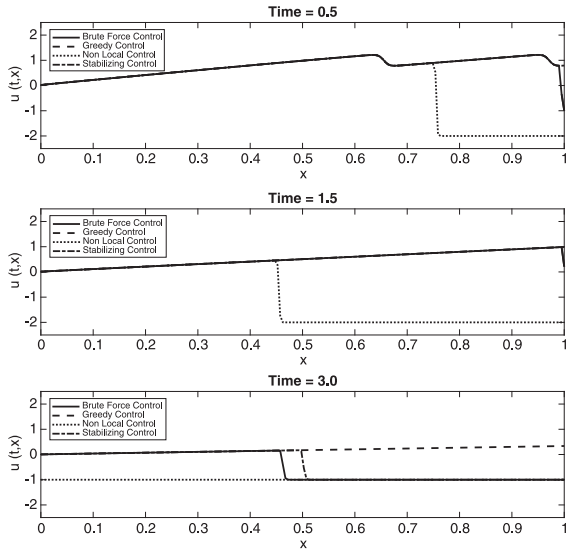


Fig. 6. Numerical solution of burgers equation: Evolution of the solution for the various controllers with oscillating initial data.

For every  $U < \hat{A}$  we define

$$T_1(U) = \frac{(b-a)(A-U)}{f(U) - f(A)}, \quad T_0(U) = T_1 - \frac{(b-a)}{|f'(U)|} \quad (31)$$

and set  $u_a^{nl}$  as in (26), while

$$u_b^{nl}(t) = \begin{cases} U & 0 \leq t \leq T_0 \\ u^* & T_0 < t < +\infty. \end{cases} \quad (32)$$

The meaning of this control is as follows. First we send a large shock  $(u_0(a), U)$  with negative speed to move the system in the zone  $u < m$  and then apply the stabilizing control. Notice that  $T_1$  is computed as the maximal time taken by the big shock to cross the interval  $[a, b]$ , while  $T_0$  is the time at which the characteristic corresponding to  $u^*$  should start from  $b$  to reach  $a$  at time  $T_1$ . These choices will guarantee the desired effect. Notice also that  $T_0$  is a safe choice, but smaller values may give a better performance. In the following section we present numerical results of the implementation of the boundary control proposed.

### VIII. NUMERICAL EXAMPLES

In this section, we present numerical results obtained for a benchmark scenario. The numerical scheme used is the standard Godunov scheme [42] with 200 cells in space and a time discretization satisfying the tight *Courant-Friedrich-Levy* (CFL) condition [56]. We consider the flux function  $u \mapsto u^2/2$ , the equilibrium state  $u^* = -1$ , and the space domain  $[0, 1]$  with the oscillating initial condition:  $u_0(x) = 1 + 0.5 \sin(20x)$ .

In Fig. 6 we present the evolution of the system under four different controllers: the greedy boundary control (defined in proposition 4), the brute force boundary control  $u_a = u_b = u^*$ , the stabilizing control [formula (25)] and nonlocal control (formula (32) with  $U = -2$  and  $T_0$  as defined in (31)). The greedy control allows oscillations to exit from the right boundary but the solution does not converge to the steady state  $u^* = -1$ . On the other side the brute force control converges to the steady state but generates oscillations on the right boundary as can be seen in Fig. 7, top. The stabilizing control also converges but it is less oscillating with respect to the brute

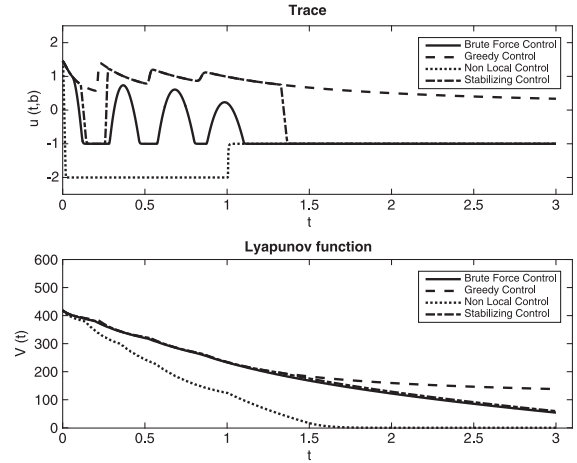


Fig. 7. Downstream trace and Lyapunov functions: the Lyapunov functions for different controls are represented in the bottom subfigure. The downstream boundary are represented in the top subfigure respectively.

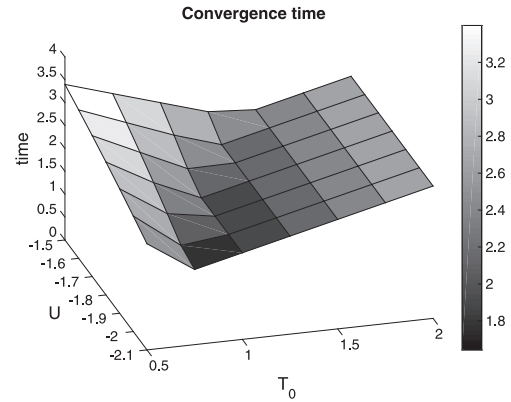


Fig. 8. Convergence time of the Lyapunov function: dependence of the convergence time of the Lyapunov function from  $U$  and  $T_0$ . The convergence time is defined as the first time for which  $V(t) \leq 0.1$ .

force control. The non local control guarantees convergence and avoids oscillations. The evolution of the solution under the action of the stabilizing control and the brute force control are very similar. The decrease of the corresponding Lyapunov functions is represented in Fig. 7, bottom. One can note how the nonlocal control decreases much faster than the other methods.

To study the dependence of the nonlocal control stabilization performance on the parameters  $U$  and  $T_0$  we run several simulations with different values of these parameters, see Fig. 8 for  $U \in [-2.1, -1.5]$  and  $T_0 \in [0.5, 2]$ . The convergence time is defined as the first time such that  $V(t) \leq 0.1$ . We notice that longest convergence time corresponds to  $U = -1.5$  and  $T_0 = 0.5$  while the fastest corresponds to  $U = -2.1$  and  $T_0 = 1$ . Moreover, for each fixed  $U$  there exists an optimal switching time  $T_0$  that minimizes the convergence time.

To further illustrate the oscillations of the boundary trace generated by the brute force control we simulated the case in which the initial datum is strongly oscillating:  $u_0(x) = 1 + 0.3 \sin(50x)$ . In Fig. 9 the trace of the brute force control shows, at initial times, one big oscillations and then the oscillations continues until  $t = 1$ . For the stabilizing control the oscillations are smaller but they extend for a longer period up to time  $t = 1.5$ .

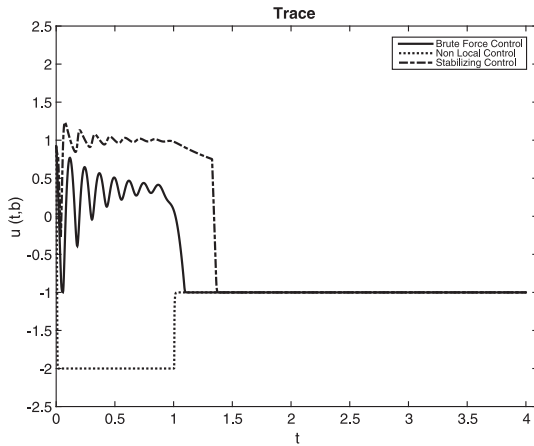


Fig. 9. **Downstream trace:** value of the solution at the right boundary for a strong oscillating initial data.

## IX. CONCLUSION

In this paper, we introduced a new technique for Lyapunov boundary stabilization results of weak entropy solutions to scalar conservation laws.

We proved that under suitable regularity of the initial and boundary data, the solution to the initial-boundary value problem could be considered to be piecewise regular with a finite number of discontinuities. This allows the use of functional analysis tools available for smooth functions.

We then computed the derivative of the Lyapunov function, and showed that the boundary control maximizing its decrease, called greedy control, may fail to stabilize. Therefore, we designed a new stabilizing controller that achieve the desired result. Moreover, we provided estimates of the total variation in space of the corresponding solution and in time of controls, allowing the treatment of BV initial data and the proof of  $L^2$  convergence.

We also introduced nonlocal controls (depending on the whole initial datum) which improve the convergence time.

Numerical results illustrate the various control techniques, including oscillation phenomena introduced by brute force control (setting the boundary value always equal to the desired equilibrium).

Extension to this work include the treatment of non-uniform stationary conditions, and the case of networks, for more applicable results to reliable water distribution and congestion control on the road network.

## APPENDIX PROOF OF PROPOSITION 3

*Proof:* We show each part of proposition 3 separately.

- We show that in the case of  $|N(t+)| = |N(t-)| - 1$  due to the interaction of two shocks inside the domain, there is a decrease in the slope of the derivative of the Lyapunov function if and only if the Rankine-Hugoniot speed of the left shock is greater than the Rankine-Hugoniot speed of the right shock, which is a necessary condition for the interaction. We compute the difference in the right and left derivative, at time  $t$ , of the Lyapunov function, by taking the difference of equation (18) at time  $t^+$  and  $t^-$ . It is clear that the boundary terms

cancel out, and that in the sum terms, only the terms corresponding to the interacting shocks and the created shock do not cancel out. We note  $(u_l^+, u_r^+)$  the left and right values at the created shock at time  $t^+$ . We use similar notations for the interacting shocks at time  $t^-$ . The left and right states of the left shock at time  $t^-$  are denoted  $(u_{1l}^-, u_{1r}^-)$ , and the left and right states of the right shock at time  $t^-$  are denoted  $(u_{2l}^-, u_{2r}^-)$ . We note that by continuity outside of the jump locations, we have  $u_{1r}^- = u_{2l}^-$ , and  $u_{1l}^- = u_l^+$  and  $u_{2r}^- = u_r^+$ . After some long but straightforward algebra, this allows us to simplify the difference to  $dV/dt(t^+) - dV/dt(t^-) = 1/2[(f(u_{1r}^-) - f(u_{1l}^-))(u_{2l}^- - u_{2r}^-) + (f(u_{2r}^-) - f(u_{2l}^-))(u_{1r}^- - u_{1l}^-)]$  and the right side is negative if and only if the two shocks intersect, which is satisfied by assumption.

- In the case of a shock entering or exiting from the boundary, we show that the sign of the difference in the right and left derivative, at time  $t$ , of the Lyapunov function, depends on the sign of  $u^* - (u^- + u^+)/2$ . We compute the difference between the Lyapunov function derivative at time  $t^+$  and at time  $t^-$ . It is clear that only the boundary term at time  $t^+$  and  $t^-$ , and the term corresponding to the entered or exited shock do not cancel out. If we note  $u^-$  the boundary trace at  $t^-$  and  $u^+$  the boundary trace at  $t^+$ , we obtain after simplification  $dV/dt(t^+) - dV/dt(t^-) = (f(u^+) - f(u^-)) \tilde{u}^- + \tilde{u}^+/2$  for both entering and exiting shocks. We treat the case of a shock entering the domain from upstream boundary for a convex flux. We have  $u^+ > u^-$  from the entropy condition, hence from the Rankine-Hugoniot relation we obtain  $f(u^+) > f(u^-)$  since the shock speed is positive. So the jump in the Lyapunov derivative is negative if and only if  $\tilde{u}^- + \tilde{u}^+ < 0$ , which is equivalent to  $(u^- + u^+)/2 < u^*$ . ■

## ACKNOWLEDGMENT

The authors would like to thank Professor Miroslav Krstic for suggesting to work on this problem during his visit at UC Berkeley and for fruitful conversation leading to the genesis of this work. At this time the second author was a visiting scholar at UC Berkeley with financial support from CEMAGREF and from the France-Berkeley fund project. The authors would also like to thank their colleague Professor Daniel Work from UIUC for numerous fruitful discussions on a related topic.

## REFERENCES

- [1] D. Amadori, "Initial-boundary value problems for nonlinear systems of conservation laws," *NoDEA: Nonlinear Differential Equations Appl.*, vol. 4, no. 1, pp. 1–42, 1997.
- [2] D. Amadori and R. Colombo, "Continuous dependence for  $2 \times 2$  conservation laws with boundary," *J. Differential Equations*, vol. 138, no. 2, pp. 229–266, 1997.
- [3] D. Amadori and R. Colombo, "Viscosity solutions and standard Riemann semigroup for conservation laws with boundary," *Rendiconti del Seminario Matematico della Universita di Padova*, vol. 99, pp. 219–245, 1998.
- [4] S. Amin, F. Hante, and A. Bayen, "On stability of switched linear hyperbolic conservation laws with reflecting boundaries," *Hybrid Syst.: Comput. Control, Lecture Notes Comput. Sci.*, vol. 4981, pp. 602–605, 2008, doi: 10.1007/978-3-540-78929-144.
- [5] F. Ancona and G. Coclite, "On the attainable set for Temple class systems with boundary controls," *SIAM J. Control Optim.*, vol. 43, no. 6, pp. 2166–2190, 2005.
- [6] F. Ancona and P. Goatin, "Uniqueness and stability of  $L^\infty$  solutions for temple class systems with boundary and properties of the attainable sets," *SIAM J. Math. Anal.*, vol. 34, no. 1, pp. 28–63, 2002.

- [7] F. Ancona and A. Marson, "On the attainable set for scalar nonlinear conservation laws with boundary control," *SIAM J. Control Optim.*, vol. 36, no. 1, pp. 290–312, 1998.
- [8] F. Ancona and A. Marson, "Asymptotic stabilization of systems of conservation laws by controls acting at a single boundary point," in *Control Methods in PDE-Dynamical Systems*, ser. Contemp. Math., vol. 426. Providence, RI, USA: Amer. Math. Soc., 2007, pp. 1–43.
- [9] F. Ancona and A. Marson, "Existence theory by front tracking for general nonlinear hyperbolic systems," *Archive Rational Mech. Anal.*, vol. 185, no. 2, pp. 287–340, 2007.
- [10] J.-P. Aubin, A. Bayen, and P. Saint-Pierre, "Dirichlet problems for some Hamilton-Jacobi equations with inequality constraints," *SIAM J. Control Optim.*, vol. 47, no. 5, pp. 2348–2380, 2008, doi: 10.1137/060659569.
- [11] C. Bardos, A.-Y. Leroux, and J.-C. Nedelec, "First order quasilinear equations with boundary conditions," *Commun. Partial Differential Equations*, vol. 4, no. 9, pp. 1017–1034, 1979.
- [12] C. Bardos and O. Pironneau, "Derivatives and control in the presence of shocks," *Comput. Fluid Dynamics J.*, vol. 11, no. 4, pp. 383–391, 2003.
- [13] G. Bastin, B. Haut, J.-M. Coron, and B. d. Andrea-Novel, "Lyapunov stability analysis of networks of scalar conservation laws," *Netw. Heterogeneous Media*, vol. 2, no. 4, pp. 751–759, 2007.
- [14] S. Bianchini, "On the shift differentiability of the flow generated by a hyperbolic system of conservation laws," *Discr. Continuous Dyn. Syst.*, vol. 6, no. 2, pp. 329–350, 2000.
- [15] S. Bianchini and A. Bressan, "Vanishing viscosity solutions of nonlinear hyperbolic systems," *Ann. Math.*, vol. 161, pp. 223–342, 2005.
- [16] S. Bianchini and L. Spinolo, "The boundary riemann solver coming from the real vanishing viscosity approximation," *Arch. Rational Mech. Anal.*, vol. 191, no. 1, pp. 1–96, 2009.
- [17] S. Blandin, X. Litrico, and A. Bayen, "Boundary stabilization of the unviscid Burgers equation using a Lyapunov method," in *Proc. 49th IEEE CDC*, Atlanta, GA, USA, 2010, pp. 1705–1712, doi: 10.1109/CDC.2010.5717716.
- [18] A. Bressan, "The unique limit of the glimm scheme," *Archive Rational Mech. Anal.*, vol. 130, no. 3, pp. 205–230, 1995.
- [19] A. Bressan, *Hyperbolic Systems of Conservation Laws: The One-Dimensional Cauchy Problem*. London, U.K.: Oxford Univ. Press, 2000.
- [20] A. Bressan and G. Coclite, "On the boundary control of systems of conservation laws," *SIAM J. Control Optim.*, vol. 41, no. 2, pp. 607–622, 2002.
- [21] A. Bressan, G. Crasta, and B. Piccoli, *Well-Posedness of the Cauchy Problem for  $n \times n$  Systems of Conservation Laws*. Providence, RI, USA: Amer. Math. Society, 2000.
- [22] A. Bressan and G. Guerra, "Shift-differentiability of the flow generated by a conservation law," *Discrete Continuous Dyn. Syst.*, vol. 3, pp. 35–58, 1997.
- [23] A. Bressan, T.-P. Liu, and T. Yang, " $L^1$  stability estimates for  $n \times n$  conservation laws," *Arch. Ration. Mech. Anal.*, vol. 149, no. 1, pp. 1–22, 1999.
- [24] J. Burns and S. Kang, "A control problem for Burgers equation with bounded input/output," *Nonlinear Dyn.*, vol. 2, no. 4, pp. 235–262, 1991.
- [25] C. Byrnes, D. Gilliam, and V. Shubov, "On the global dynamics of a controlled viscous Burgers equation," *J. Dyn. Control Syst.*, vol. 4, no. 4, pp. 457–519, 1998.
- [26] P. Christofides, *Nonlinear and Robust Control of PDE Systems: Methods and Applications to Transport-Reaction Processes*. Boston, MA, USA: Birkhäuser, 2001.
- [27] J.-M. Coron, B. d'Andrea-Novel, and G. Bastin, "A strict Lyapunov function for boundary control of hyperbolic systems of conservation laws," *IEEE Trans. Autom. Control*, vol. 52, no. 1, pp. 2–11, 2007.
- [28] J.-M. Coron, O. Glass, and Z. Wang, "Exact boundary controllability for 1-d quasilinear hyperbolic systems with a vanishing characteristic speed," *SIAM J. Control Optim.*, vol. 48, no. 5, pp. 3105–3122, 2009.
- [29] C. Dafermos, *Hyperbolic Conservation Laws in Continuum Physics*. Berlin, Germany: Springer-Verlag, 2010.
- [30] J. De Halleux, C. Prieur, J. M. Coron, B. d'Andréa-Novel, and G. Bastin, "Boundary feedback control in networks of open channels," *Automatica*, vol. 39, no. 8, pp. 1365–1376, 2003.
- [31] M. Demetriou and I. Hussein, "Estimation of spatially distributed processes using mobile spatially distributed sensor network," *SIAM J. Control Optim.*, vol. 48, no. 1, pp. 266–291, 2009.
- [32] C. Donadello and A. Marson, "Stability of front tracking solutions to the initial and boundary value problem for systems of conservation laws," *Nonlinear Differential Equations Appl.*, vol. 14, no. 5/6, pp. 569–592, 2007.
- [33] V. DosSantos, G. Bastin, J.-M. Coron, and B. d'Andréa-Novel, "Boundary control with integral action for hyperbolic systems of conservation laws: Stability and experiments," *Automatica*, vol. 44, no. 5, pp. 1310–1318, 2008.
- [34] N. El-Farra and P. Christofides, "Coordinating feedback and switching for control of spatially distributed processes," *Comput. Chem. Eng.*, vol. 28, no. 1/2, pp. 111–128, 2004.
- [35] L. Evans, *Partial Differential Equations*. Providence, RI, USA: Amer. Math. Society, 1998.
- [36] M. Fliess, J. Lévine, P. Martin, and P. Rouchon, "Flatness and defect of non-linear systems: introductory theory and examples," *Int. J. Control*, vol. 61, no. 6, pp. 1327–1362, 1995.
- [37] H. Frankowska, "On lefloch solutions to initial-boundary value problem for scalar conservation laws," *J. Hyperbolic Differential Equations*, vol. 7, no. 3, pp. 1–41, 2010.
- [38] M. Garavello and B. Piccoli, *Traffic Flow on Networks*. Springfield, MO, USA: Amer. Institute Math. Sci., 2006.
- [39] O. Glass, "On the controllability of the 1-d isentropic euler equation," *J. Eur. Math. Soc.*, vol. 9, no. 3, pp. 427–486, 2007.
- [40] O. Glass, "On the controllability of the non-isentropic 1-d euler equation," *J. Differential Equations*, vol. 257, no. 3, pp. 638–719, 2014.
- [41] J. Glimm, "Solutions in the large for nonlinear hyperbolic systems of equations," *Comm. Pure Appl. Math.*, vol. 18, pp. 697–715, 1965.
- [42] S. Godunov, "A difference method for numerical calculation of discontinuous solutions of the equations of hydrodynamics," *Matematicheskii Sbornik*, vol. 89, no. 3, pp. 271–306, 1959.
- [43] G. Gomes and R. Horowitz, "Optimal freeway ramp metering using the asymmetric cell transmission model," *Transportation Res. Part C: Emerging Technol.*, vol. 14, no. 4, pp. 244–262, 2006.
- [44] M. Gugat and G. Leugering, "Global boundary controllability of the saint-venant system for sloped canals with friction," in *Annales de l'Institut Henri Poincaré*, vol. 26. New York, NY, USA: Elsevier, 2009, pp. 257–270.
- [45] E. Hopf, "The partial differential equation  $u_t + u u_x = \mu u_{xx}$ ," *Comm. Pure Appl. Math.*, vol. 3, no. 3, pp. 201–230, 1950.
- [46] D. Jacquet, M. Krstic, and C. Canudasde Wit, "Optimal control of scalar one-dimensional conservation laws," in *Proc. 25th Amer. Control Conf.*, Minneapolis, MN, USA, 2006, pp. 5213–5218.
- [47] T. Kobayashi, "Adaptive regulator design of a viscous Burgers system by boundary control," *IMA J. Math. Control Inform.*, vol. 18, no. 3, pp. 427, 2001.
- [48] M. Krstic, "On global stabilization of burgers equation by boundary control," *Syst. Control Lett.*, vol. 37, no. 3, pp. 123–141, 1999.
- [49] M. Krstic and H. Deng, *Stabilization of Nonlinear Uncertain Systems*. New York, NY, USA: Springer, 1998.
- [50] M. Krstic and A. Smyshlyaev, *Boundary Control of PDEs: A Course on Backstepping Designs*. Philadelphia, PA, USA: SIAM, 2008.
- [51] S. Kruzhkov, "First order quasilinear equations in several independent variables," *Math. USSR-Sbornik*, vol. 10, no. 2, pp. 217–243, 1970.
- [52] P. Lax, "Hyperbolic systems of conservation laws II," *Comm. Pure Appl. Math.*, vol. 10, pp. 537–566, 1957.
- [53] M. Leautaud, "Uniform controllability of scalar conservation laws in the vanishing viscosity limit," *SIAM J. Control Optim.*, vol. 50, no. 3, pp. 1661–1699, 2012.
- [54] P. LeFloch, "Explicit formula for scalar non-linear conservation laws with boundary conditions," *Math. Methods Appl. Sci.*, vol. 10, no. 3, pp. 265–287, 1988.
- [55] P. LeFloch, *Hyperbolic Systems of Conservation Laws: The Theory of Classical and Nonclassical Shock Waves*, ser. Lectures in Mathematics. ETH Zürich: Birkhäuser Basel, 2002.
- [56] R. Leveque, *Finite Volume Methods for Hyperbolic Problems*. Cambridge, U.K., Cambridge Univ. Press, 2002.
- [57] P. Li, R. Horowitz, L. Alvarez, J. Frankel, and M. Robertson, "An AHS link layer controller for traffic flow stabilization," *Transportation Res., Part C: Emerging Technol.*, vol. 5, no. 1, pp. 11–37, 1997.
- [58] M. Lighthill and G. Whitham, "On kinematic waves, II: A theory of traffic flow on long crowded roads," *Proc. Royal Soc. London*, vol. 229, no. 1178, pp. 317–345, 1956.
- [59] X. Litrico and V. Fromion, "Frequency modeling of open-channel flow," *J. Hydraulic Eng.*, vol. 130, no. 8, pp. 806–815, 2004.
- [60] X. Litrico and V. Fromion, "Boundary control of hyperbolic conservation laws using a frequency domain approach," *Automatica*, vol. 45, no. 3, pp. 647–656, 2009.
- [61] T. P. Liu, "Invariants and asymptotic behavior of solutions of a conservation law," *Proc. Amer. Math. Soc.*, vol. 71, no. 2, pp. 227–231, 1978.
- [62] H. Ly, K. Mease, and E. Titi, "Distributed and boundary control of the viscous Burgers equation," *Num. Functional Anal. Optim.*, vol. 18, no. 1, pp. 143–188, 1997.
- [63] O. Oleinik, "Discontinuous solutions of non-linear differential equations," *Uspekhi Matematicheskikh Nauk*, vol. 12, no. 3, pp. 3–73, 1957.
- [64] F. Otto, "Initial-boundary value problem for a scalar conservation law," *Comptes rendus de l'Académie des Sciences. Série 1, Mathématique*, vol. 322, no. 8, pp. 729–734, 1996.
- [65] V. Perrollaz, "Exact controllability of scalar conservation laws with an additional control in the context of entropy solutions," *SIAM J. Control Optim.*, vol. 50, no. 4, pp. 2025–2045, 2012.

- [66] V. Perrollaz, "Asymptotic stabilization of entropy solutions to scalar conservation laws through a stationary feedback law," in *Annales de l'Institut Henri Poincaré (C) Non Linear Analysis*, vol. 30. Elsevier, 2013, pp. 879–915.
- [67] C. Prieur and F. Mazenc, "Iss-lyapunov functions for time-varying hyperbolic systems of balance laws," *Mathe. Control, Signals, Syst.*, vol. 24, no. 1/2, pp. 111–134, 2012.
- [68] C. Prieur, J. Winkin, and G. Bastin, "Robust boundary control of systems of conservation laws," *Mathe. Control, Signals, Syst.*, vol. 20, no. 2, pp. 173–197, 2008.
- [69] P. Richards, "Shock waves on the highway," *Operations Res.*, vol. 4, no. 1, pp. 42–51, 1956.
- [70] N. Seguin and J. Vovelle, "Analysis and approximation of a scalar conservation law with a flux function with discontinuous coefficients," *Math. Models Methods Appl. Sci.*, vol. 13, no. 02, pp. 221–257, 2003.
- [71] D. Serre, *Systems of Conservation Laws*. Paris, France: Diderot, 1996.
- [72] N. Smaoui, "Boundary and distributed control of the viscous Burgers equation," *J. Comput. Appl. Math.*, vol. 182, no. 1, pp. 91–104, 2005.
- [73] L. Spinolo, "Vanishing viscosity solutions of a  $2 \times 2$  triangular hyperbolic system with Dirichlet conditions on two boundaries," *Indiana Univ. Math. J.*, vol. 56, no. 1, pp. 279–364, 2007.
- [74] I. Strub and A. Bayen, "Weak formulation of boundary conditions for scalar conservation laws: an application to highway traffic modelling," *Int. J. Robust Nonlinear Control*, vol. 16, no. 16, pp. 733–748, 2006, doi: 10.1002/rnc.1099.
- [75] B. Temple, "Systems of conservation laws with invariant submanifolds," *Trans. Amer. Math. Society*, vol. 280, no. 2, pp. 781–795, 1983.
- [76] R. Vazquez, J.-M. Coron, M. Krstic, and G. Bastin, "Local exponential  $h^2$  stabilization of a  $2 \times 2$  quasilinear hyperbolic system using backstepping," in *Proc. IEEE Conf. CDC-ECC*, 2011, pp. 1329–1334, IEEE.
- [77] D. Work, S. Blandin, O.-P. Tossavainen, B. Piccoli, and A. Bayen, "A traffic model for velocity data assimilation," *Appl. Math. Res. Express*, vol. 1, pp. 1–35, 2010, doi: 10.1093/amrx/abq002.



**Sébastien Blandin** received the Engineering Degree in applied mathematics from the École Polytechnique, Palaiseau, France, in 2006, the Master Degree in transportation from École Nationale des Ponts et Chaussées, Champs-sur-Marne, France, in 2007, and the Master Degree in applied mathematics and numerical analysis from University Paris VI, Paris, France, in 2008.

He is a Research Scientist leading mobility-related research efforts at IBM Research Singapore. His interests lie in the design and implementation of algorithms for modeling, estimation and control of urban networks. During his PhD work at UC Berkeley from 2008 to 2011, he was involved at an early stage in the Mobile Century experiment (2008), and the Mobile Millennium project, which pioneered the use of crowd-sourced data for real-time traffic estimation.

Dr. Blandin's awards include the 2010 CDC Best Student Paper Award Finalist, the 2010 Dwight David Eisenhower Fellowship, and the 2012 and 2014 IBM Research Outstanding Technical Achievement Award.



**Xavier Litrico** is a graduate from the École Polytechnique, Palaiseau, France, and the École Nationale du Génie Rural, des Eaux et des Forêts. He holds a Ph.D. in Water Sciences and an "Habilitation à Diriger des Recherches" in Control Engineering.

He spent the first part of his career as a researcher in the public sector (Irstea, formerly Cemagref, the French Public Research Institute on Environmental Engineering, Inria and UC Berkeley). Since 2011, he has been with SUEZ Water France (ex-Lyonnais des Eaux), a leading firm in the water business. He is the Director of LyRE, the R&D center of SUEZ in Bordeaux University, which develops research project in collaboration with academic partners on water related issues. With a team of 40 people, LyRE participates in more than 20 projects in partnership with academic researchers, around 4 research themes: water networks, water stakeholders and users, environment, data science. Deeply rooted in the Aquitaine region, LyRE also operates at the national and international level on its domains of expertise for SUEZ. Since 2015, he is also Scientific Director for digital, environment, and customer relations of SUEZ Water France.



**Maria Laura Delle Monache** received the B.S. degree in industrial engineering from the University of L'Aquila, L'Aquila, Italy, the M.S. degree in mathematical engineering from the University of L'Aquila, and the University of Hamburg, Hamburg, Germany, and the Ph.D. degree in applied mathematics from the University of Nice-Sophia Antipolis, Nice, France in 2009, 2011, and 2014, respectively.

She is currently a Postdoctoral Associate at Rutgers University, Camden, NJ, USA. Her research interests include control and modeling of traffic networks.



**Benedetto Piccoli** serves as the Associate Provost for Research at Rutgers University, Camden, NJ, USA. He is also Distinguished Professor and Joseph and Loretta Lopez Chair Professor of Mathematics. His research interests include traffic flow on networks, control, and hybrid systems, systems biology, mathematical finance, and others. He has published more than 200 papers and five books, is the EIC and Founding Editor of *Networks and Heterogeneous Media*.

Dr. Piccoli was the recipient of the Fubini Prize 2009 and was made an AMS Fellow in 2012.



**Alexandre Bayen** received the Engineering Degree in applied mathematics from the École Polytechnique, Palaiseau, France, in July 1998, and the M.S. and the Ph.D. degrees in aeronautics and astronautics from Stanford University, Stanford, CA, USA, in June 1999, and December 2003, respectively.

He is the Liao-Cho Professor of Engineering at UC Berkeley, Berkeley, CA, USA, in the Department of Electrical Engineering and Computer Science and Civil and Environmental

Engineering. He is the Director of the Institute of Transportation Studies, and a Faculty Scientist at the Lawrence Berkeley National Laboratory, Berkeley, CA, USA, where he is the Director of the Transportation Initiative. He was a Visiting Researcher at NASA Ames Research Center from 2000 to 2003. Between January 2004 and December 2004, he worked as the Research Director of the Autonomous Navigation Laboratory at the Laboratoire de Recherches Balistiques et Aérodynamiques, (Ministère de la Défense, Vernon, France), where he holds the rank of Major. He authored two books, and over 200 peer-reviewed publications. His research has been featured several hundred times in the media, including TV channels and radio stations (CBS, NBC, ABC, CNET, NPR, KGO, the BBC), and in the popular press (*The Economist*, *The Wall Street Journal*, *The New York Times*, *The Washington Post*).

Dr. Bayen's projects Mobile Century and Mobile Millennium received the 2008 Best of ITS Award for Best Innovative Practice, at the ITS World Congress and a TRANNY Award from the California Transportation Foundation, 2009. He is a NASA Top 10 Innovators on Water Sustainability, 2010. He has received several awards including the Ballhaus Award from Stanford University, 2004; the CAREER Award from the National Science Foundation, 2009; the Presidential Early Career Award for Scientists and Engineers (PECASE) from the White House, 2010; the Okawa Research Grant Award, 2013; the Ruberti Prize from the IEEE, 2013, and the Walter Huber Prize from the ASCE, 2014.